LAMPTUB 60 SUSPENDED TRACK

L61ST084MOIO940D3

LTUB60 SUT 840 3700 NW D/I OPAL DALI WE

Description:

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.



 Finish:
 Palette WELLBEING - 3 TEXTURED

 Dimensions:
 847 x 67 x 80 mm


Weight: 2.110 g

Installation: 3-Circuit track

TECHNICAL SPECIFICATIONS:

Light output:	2.246 lm	⁰K :	4000
Plum:	27,8W	CRI :	90
Efficacy:	80,8 lm/w	R9 :	70
Туре:	MID POWER LED	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	23.6W	Gear:	Adjustable DALI

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SUSPENDED TRACK


L61ST084MOIO940D3

LTUB60 SUT 840 3700 NW D/I OPAL DALI WE



PHOTOMETRIC DATA :

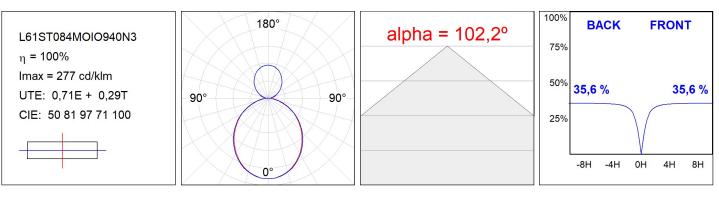

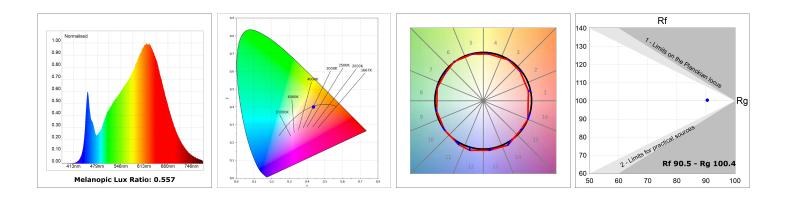

LAMPTUB 60 SUSPENDED TRACK

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.