Product datasheet

LAMPTUB 60 SUSPENDED TRACK

L61ST084MOIO940DB

LTUB60 SUT 840 3700 NW D/I OPAL DALI BK

Description:

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.



Finish: Matte black RAL 9011

Dimensions: 847 x 67 x 80 mm **Weight:** 2.110 g

Installation: 3-Circuit track

TECHNICAL SPECIFICATIONS:

Light output:	2.246 lm	**ºK :**	4000
Plum:	27,8W	**CRI :**	90
Efficacy:	80,8 lm/w	**R9 :**	70
Type:	MID POWER LED	**MacAdam:**	3
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)	**Power Supply:**	220-240V 50/60Hz
Power:	23.6W	**Gear:**	Adjustable DALI

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

LAMPTUB 60 SUSPENDED TRACK

L61ST084MOIO940DB **LTUB60 SUT 840 3700 NW D/I OPAL DALI BK**

PHOTOMETRIC DATA :

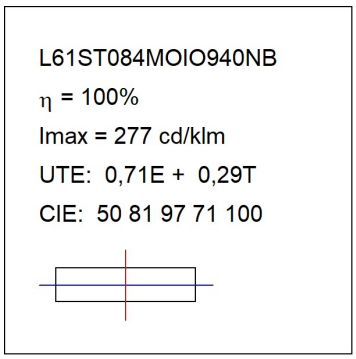

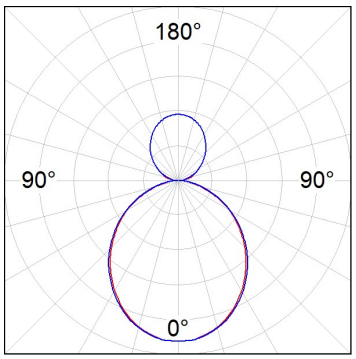

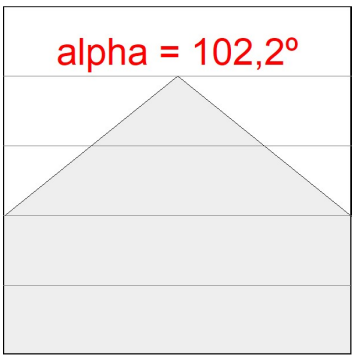

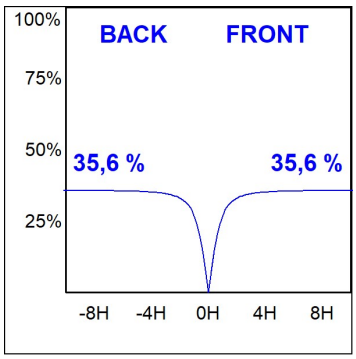

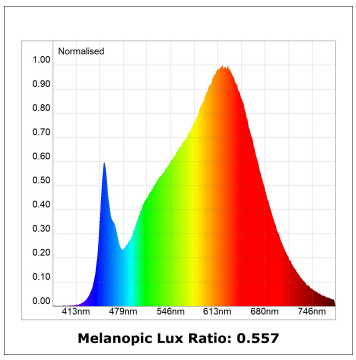

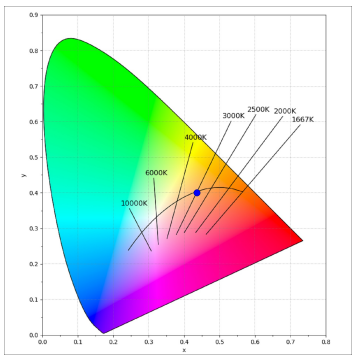

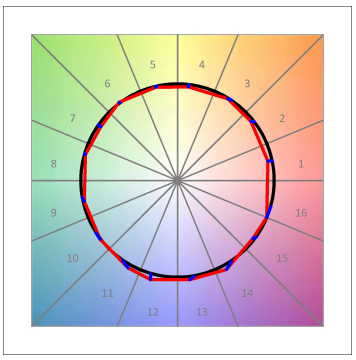

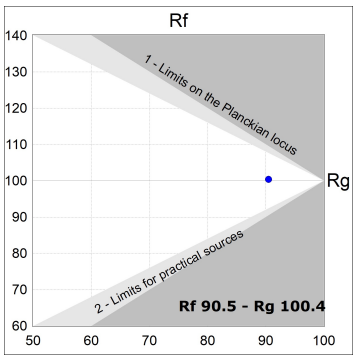

ACCESORIES :

Assembly

Product code:	Description:
L6SUECB	LTUB60 ACC. SUR END COVER BK.

Product code:	Description:
L6SUECW	LTUB60 ACC. SUR END COVER WH.

Product code:	Description:
L6SUECW3	LTUB60 ACC. SUR END COVER WE.

Product code:	Description:
L6SUECW4	LTUB60 ACC. SUR END COVER BS.

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU