LAMPTUB 60 SUSPENDED TRACK

L61ST112MOIO927NB



LTUB60 SUT 1120 4700 VWW D/I OPAL BK

Description:

Finish:

Dimensions:

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1120mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 2700K with CRI90. Built-in electronic ON/OFF control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Weight: 2.730 g




Installation: 3-Circuit track

Matte black RAL 9011 s: 1.127 x 67 x 80 mm

TECHNICAL SPECIFICATIONS:

Light output:	2.798 lm	⁰K :	2700
Plum:	34,6W	CRI :	90
Efficacy:	80,9 lm/w	R9 :	57
Туре:	MID POWER LED	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25⁰C)	Power Supply:	220-240V 50/60Hz
Power:	30.1W	Gear:	Electronic

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SUSPENDED TRACK


L61ST112MOIO927NB

LTUB60 SUT 1120 4700 VWW D/I OPAL BK



PHOTOMETRIC DATA :

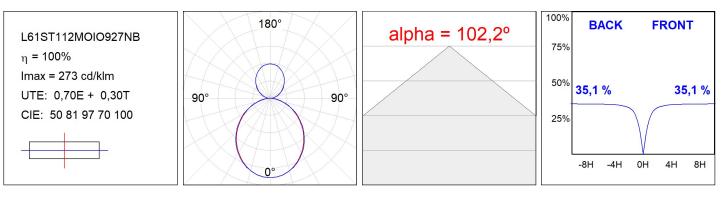

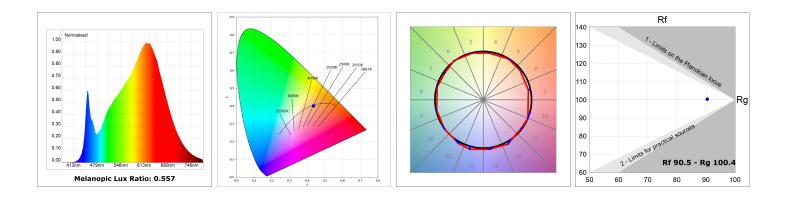

LAMPTUB 60 SUSPENDED TRACK

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.