
LAMPTUB 60 SUSPENDED TRACK

L61ST112MOTE930DW



LTUB60 SUT 1120 2960 9WW TECH DA WH

Description:

Finish:

Dimensions:

Luminaire to be installed on a suspended rail, model LAMPTUB 60 TECH by LAMP. Made of 80% recycled aluminium extrusion, with circular section of 60mm and length 1120 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<16. Model for MID-POWER LED, with colour temperature 3000K and CRI90. Built-in electronic DALI wiring. With IP20, IK07 degree of protection. Insulation class II. Photobiological safety group 0. Lifetime:50000 L90 B10 Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette. Compatible with Lamp Nomadic system.




Matte white RAL 9010 s: 1.120 x 67 x 80 mm

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.680 lm	°K :	3000
Plum:	17,8W	CRI :	90
Efficacy:	94,4 lm/w	R9 :	61
UGR:	<16	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	14W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Worktitude for light


LAMPTUB 60 SUSPENDED TRACK


L61ST112MOTE930DW

LTUB60 SUT 1120 2960 9WW TECH DA WH



PHOTOMETRIC DATA :

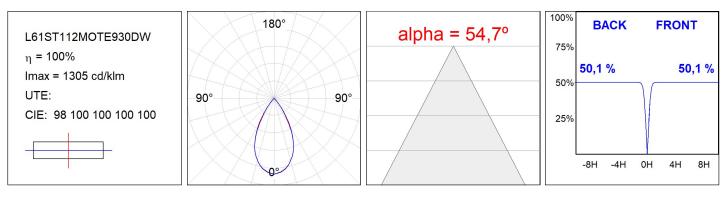

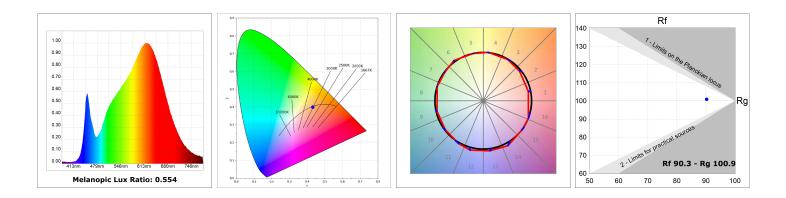

LAMPTUB 60 SUSPENDED TRACK

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.