

## LAMP TUB 60 SUSPENDED TRACK

## TECHNICAL DATA ON REVIEW

L61ST168MOIP930DW



LTUB60 SUT 1680 7300 WW D/I COMF DALI WH

## Description:

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1680mm. Direct-indirect light model with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 3000K with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Matte white RAL 9010

Dimensions: 1.687 x 67 x 80 mm

Weight: 3.980 g

Installation: 3-Circuit track

## TECHNICAL SPECIFICATIONS:

Light output:	4.248 lm	°K :	3000
Plum:	50,8W	CRI :	90
Efficacy:	83,6 lm/w	R9 :	64
UGR:	<19	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	45.2W		

Light output tolerance +/- 10%





## CUSTOM MADE OPTIONS:



LAMPTUB 60 SUSPENDED TRACK  
TECHNICAL DATA ON REVIEW

L61ST168MOIP930DW LTUB60 SUT 1680 7300 WW D/I COMF DALI WH

PHOTOMETRIC DATA :

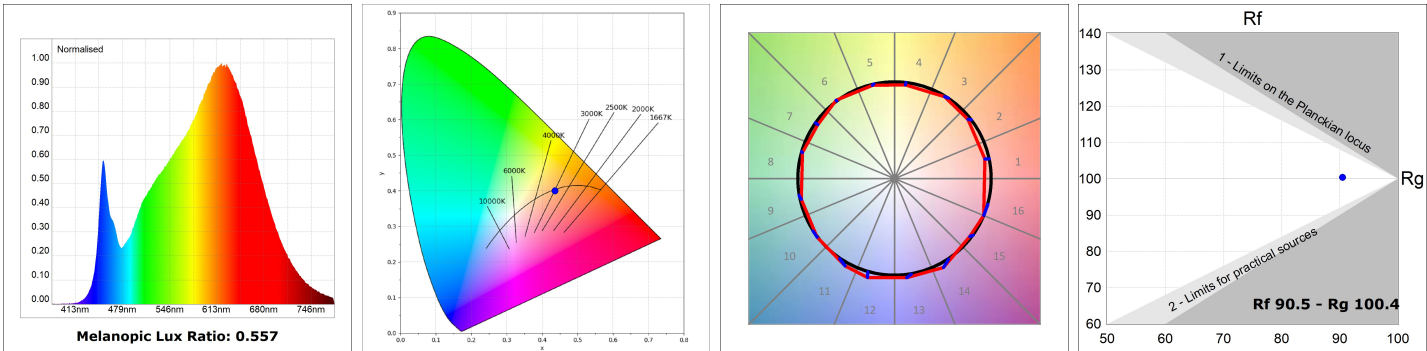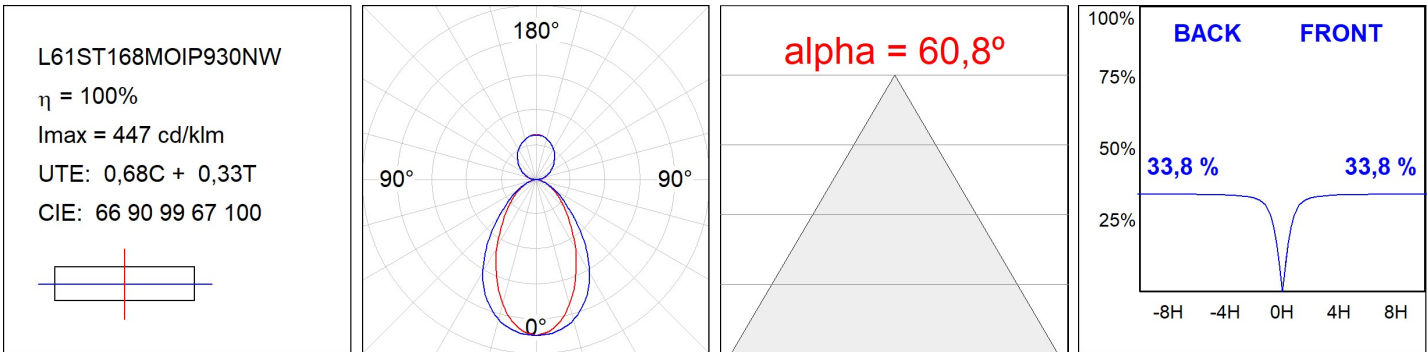

LAMPTUB 60 SUSPENDED TRACK  
**TECHNICAL DATA ON REVIEW**

ACCESORIES :

Assembly



**Product code:**  
L6SUECB

**Description:**  
LTUB60 ACC. SUR END COVER BK.



**Product code:**  
L6SUECW

**Description:**  
LTUB60 ACC. SUR END COVER WH.



**Product code:**  
L6SUECW3

**Description:**  
LTUB60 ACC. SUR END COVER WE.



**Product code:**  
L6SUECW4

**Description:**  
LTUB60 ACC. SUR END COVER BS.