

# LAMP TUB 60 SUSPENDED TRACK

L61ST168MOIP940D3



- LTUB60 SUT 1680 7600 NW D/I COMF DALI WE

**Description:**

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1680mm. Direct-indirect light model with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.



**Finish:** Palette WELLBEING - 3 TEXTURED

**Dimensions:** 1.687 x 67 x 80 mm

**Weight:** 3.980 g

**Installation:** 3-Circuit track

**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 4.527 lm                 | <b>°K :</b>          | 4000             |
| <b>Plum:</b>         | 50,8W                    | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 86,3 lm/w                | <b>R9 :</b>          | 70               |
| <b>UGR:</b>          | <19                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | MID POWER LED            | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 72.000 L80 B10 (Ta=25°C) | <b>Gear:</b>         | Adjustable DALI  |
| <b>Power:</b>        | 45.2W                    |                      |                  |

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**






LAMPTUB 60 SUSPENDED TRACK

L61ST168MOIP940D3

LTUB60 SUT 1680 7600 NW D/I COMF DALI WE

PHOTOMETRIC DATA :

L61ST168MOIP940N3  
 $\eta = 100\%$   
 $I_{max} = 447 \text{ cd/klm}$   
 UTE: 0,68C + 0,33T  
 CIE: 66 90 99 67 100

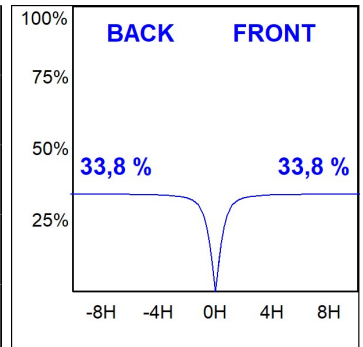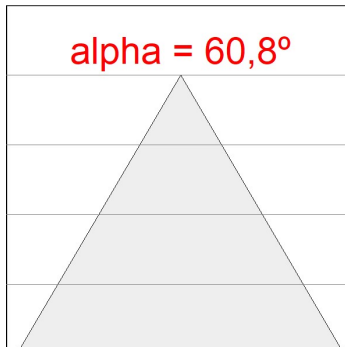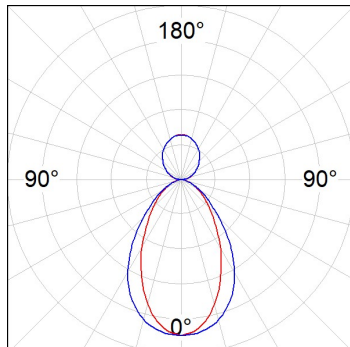

ACCESORIES :

Assembly



**Product code:**

L6SUECB

**Description:**

LTUB60 ACC. SUR END COVER BK.



**Product code:**

L6SUECW

**Description:**

LTUB60 ACC. SUR END COVER WH.



**Product code:**

L6SUECW3

**Description:**

LTUB60 ACC. SUR END COVER WE.



**Product code:**

L6SUECW4

**Description:**

LTUB60 ACC. SUR END COVER BS.