LAMPTUB 60 SUSPENDED TRACK

L61ST168MOTE940DB

LTUB60 SUT 1680 4400 9NW TECH DA BK

Description:

Finish:

Dimensions:

""""""Luminaire to be installed on a suspended rail, model LAMPTUB 60 TECH by LAMP. Made of 80% recycled aluminium extrusion, with circular section of 60mm and length 1680mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<16. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic DALI wiring. With IP20, IK07 degree of protection. Insulation class II. Photobiological safety group 0. Lifetime:50000 L90 B10 Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette. Compatible with Lamp Nomadic system. ""



Installation: Suspended

Matte black RAL 9011

1.680 x 67 x 80 mm

TECHNICAL SPECIFICATIONS:

Light output:	2.640 lm	⁰K :	4000
Plum:	26,7W	CRI :	90
Efficacy:	98,9 lm/w	R9 :	85
UGR:	<16	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	22W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SUSPENDED TRACK


L61ST168MOTE940DB

LTUB60 SUT 1680 4400 9NW TECH DA BK



PHOTOMETRIC DATA :

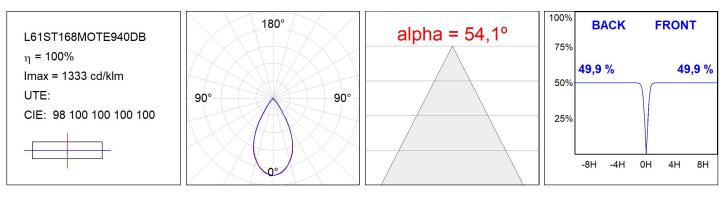

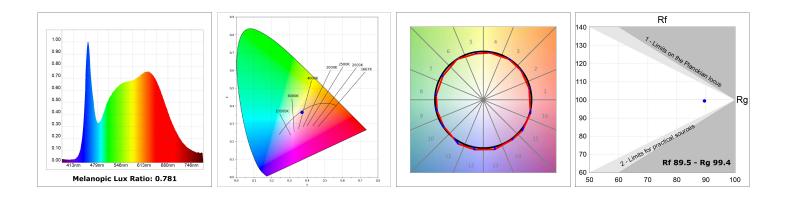

LAMPTUB 60 SUSPENDED TRACK

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.