
LAMPTUB 60 SURFACE TRACK

L61TK112LOOC9TWD3



LTUB60 TRACK 220 1120 1600 TW COMF DA WE

Description:

Lamptub 60 model from LAMP to be installed on a surface-mounted rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1120mm, an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L90 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Weight: 2.610 g

Finish:	Palette WELLBEING - 3 TEXTURED
Dimensions	: 1.127 x 67 x 112 mm




Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.207 lm	°K :	TW
Plum:	15,3W	CRI :	90
Efficacy:	78,9 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Туре:	MID POWER LED	Gear:	Adjustable DALI DT8
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	11.8W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SURFACE TRACK


L61TK112LOOC9TWD3

LTUB60 TRACK 220 1120 1600 TW COMF DA WE



PHOTOMETRIC DATA :

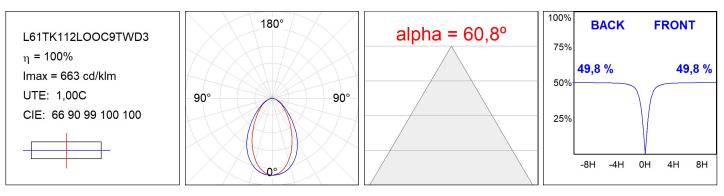

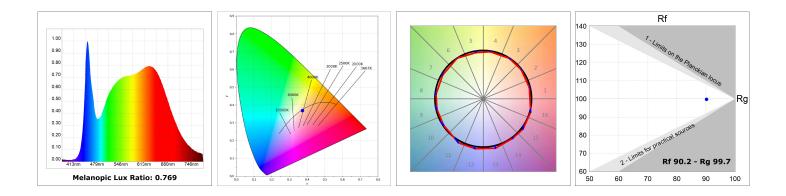

LAMPTUB 60 SURFACE TRACK

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.