

LAMPTUB 60 SURFACE TRACK

L61TK112MOTE940NB

- LTUB60 TK 220 1120 2960 9NW TECH BK



Description:

""""""Luminaire to be installed on a surface-mounted rail, model LAMPTUB 60 TECH by LAMP. Made of 80% recycled aluminium extrusion, with circular section of 60mm and length 1120 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<16. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic wiring. With IP20, IK07 degree of protection. Insulation class II. Photobiological safety group 0. Lifetime:50000 L90 B10 Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette. Compatible with Lamp Nomadic system. "" "

Finish: Matte black RAL 9011

Dimensions: 1.120 x 67 x 80 mm



Installation: Suspended

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.760 lm | °K : | 4000 |
| Plum: | 17,8W | CRI : | 90 |
| Efficacy: | 98,9 lm/w | R9 : | 85 |
| UGR: | <16 | MacAdam: | 3 |
| Type: | MID POWER LED | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L90 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 14W | | |

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:










LAMPTUB 60 SURFACE TRACK

L61TK112MOTE940NB

LTUB60 TK 220 1120 2960 9NW TECH BK

PHOTOMETRIC DATA :

L61TK112MOTE940NB
 $\eta = 100\%$
 $I_{max} = 1333 \text{ cd/klm}$
 UTE:
 CIE: 98 100 100 100 100

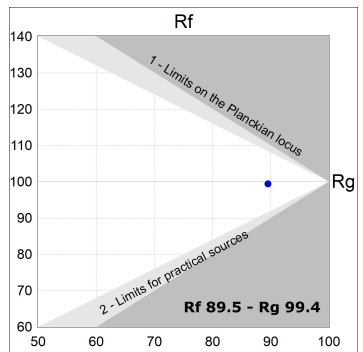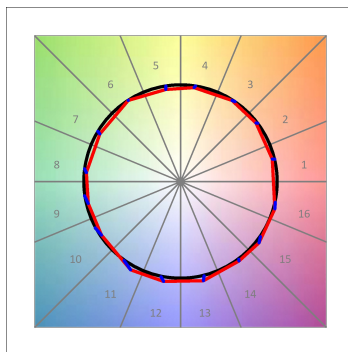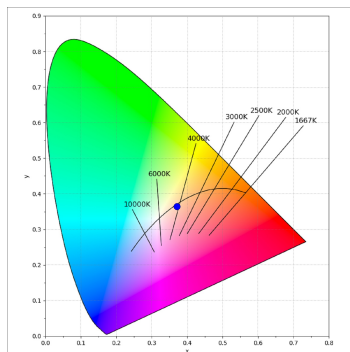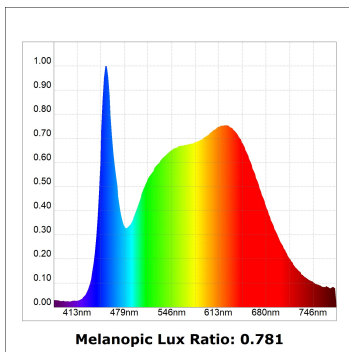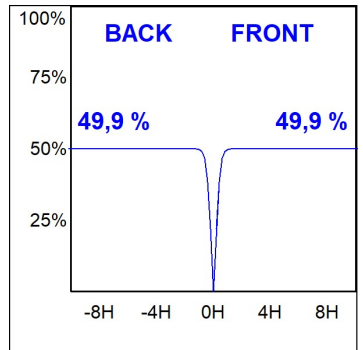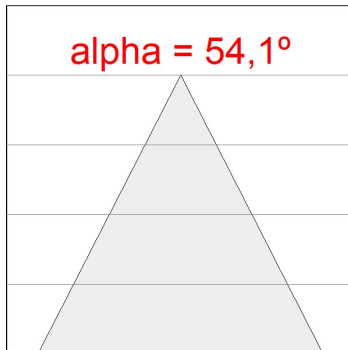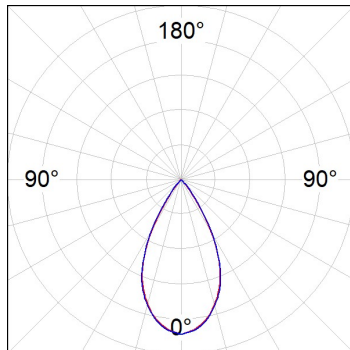

ACCESORIES :

Assembly



Product code:
L6SUECB

Description:
LTUB60 ACC. SUR END COVER BK.



Product code:
L6SUECW

Description:
LTUB60 ACC. SUR END COVER WH.



Product code:
L6SUECW3

Description:
LTUB60 ACC. SUR END COVER WE.



Product code:
L6SUECW4

Description:
LTUB60 ACC. SUR END COVER BS.