

## LAMP TUB 60 SURFACE TRACK

L61TK168MOOC9TWD3



## LTUB60 TRACK 220 1680 4900 TW COMF DA WE

## Description:


Lamptub 60 model from LAMP to be installed on a surface-mounted rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1680mm, an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L90 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Palette WELLBEING - 3 TEXTURED

Dimensions: 1.687 x 67 x 112 mm

Weight: 3.810 g

Installation: Suspended



## TECHNICAL SPECIFICATIONS:

Light output:	2.794 lm	°K :	TW
Plum:	33W	CRI :	90
Efficacy:	84,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI DT8
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	27.7W		

Light output tolerance +/- 10%



## CUSTOM MADE OPTIONS:




LAMPTUB 60 SURFACE TRACK

L61TK168MOOC9TWD3

LTUB60 TRACK 220 1680 4900 TW COMF DA WE

PHOTOMETRIC DATA :

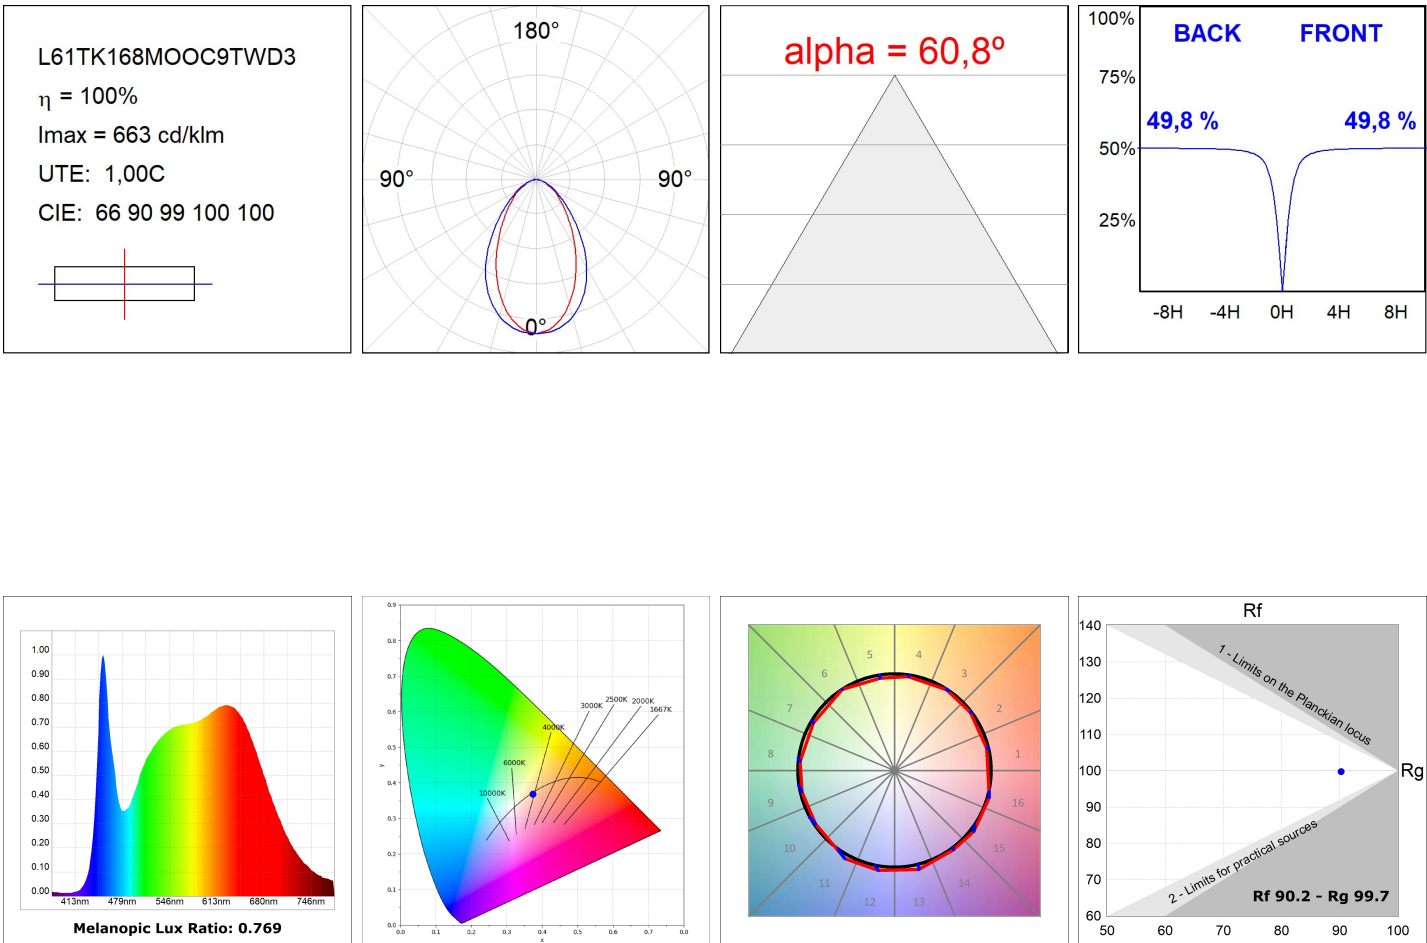

ACCESORIES :

Assembly



**Product code:**  
L6SUECB

**Description:**  
LTUB60 ACC. SUR END COVER BK.



**Product code:**  
L6SUECW

**Description:**  
LTUB60 ACC. SUR END COVER WH.



**Product code:**  
L6SUECW3

**Description:**  
LTUB60 ACC. SUR END COVER WE.



**Product code:**  
L6SUECW4

**Description:**  
LTUB60 ACC. SUR END COVER BS.