

## MCE1121240PR830DW



## MOD CUSTOM EFF 120x12 4200 WW PR DA WH

**Description:**

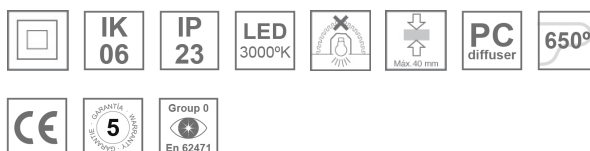
LAMP MODULAR CUSTOM EFFICIENCY recessed 1200x120 format. Custom option: adaptable to any installation, technical ceiling, finish or technical aspects by the needs of the project. Made of steel, prismatic diffuser of translucent polycarbonate and an optical film to control light distribution and reduce glare UGR <19. Model for MID-POWER LED, 3000K colour temperature and IRC 80. Control DALI gear included. With a protection rating of IP23. Insulation class II. Photobiological safety group 0. Lifetime: 50.000 L80 B10.

**Finish:** Matte white RAL 9010

**Dimensions:** 1.200 x 120 x 59,3 mm

**Installation:** Surface
**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.866 lm	<b>°K :</b>	3000
<b>Plum:</b>	25W	<b>CRI :</b>	80
<b>Efficacy:</b>	114,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	MID POWER	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)		
<b>Power:</b>	22W		

*Light output tolerance +/- 10%*
**CUSTOM MADE OPTIONS:**

MCE1121240PR830DW

MOD CUSTOM EFF 120x12 4200 WW PR DA WH

**PHOTOMETRIC DATA :**

