

MCE1121240PR830NW



- MOD CUSTOM EFF 120x12 4200 WW PR WH

Description:

LAMP MODULAR CUSTOM EFFICIENCY recessed 1200x120 format. Custom option: adaptable to any installation, finish or technical aspect. Made of steel, prismatic diffuser of translucent polycarbonate and an optical film to control light distribution and reduce glare UGR <19. Model for MID-POWER LED, 3000K colour temperature and IRC 80. Control gear included. With a protection rating of IP23. Insulation class II. Photobiological safety group 0. Lifetime: 50.000 L80 B10.

Finish: Matte Traffic white RAL 9016

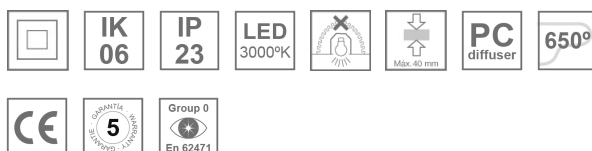
Dimensions: 1.200 x 120 x 59,3 mm

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.866 lm	°K :	3000
Plum:	25W	CRI :	80
Efficacy:	114,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER	Gear:	Electronic
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	22W		

Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**

MCE1121240PR830NW MOD CUSTOM EFF 120x12 4200 WW PR WH

PHOTOMETRIC DATA :

