


MCE1123050PR830DW



- MOD CUSTOM EFF 120X30 5000 WW PR DA WH

Description:


LAMP MODULAR CUSTOM EFFICIENCY recessed 1200X300 format. Custom option: adaptable to any installation, technical ceiling, finish or technical aspects by the needs of the project. Made of steel, prismatic diffuser of translucent polycarbonate and an optical film to control light distribution and reduce glare UGR <19. Model for MID-POWER LED, 3000K colour temperature and IRC 80. Control DALI gear included. With a protection rating of IP23. Insulation class II. Photobiological safety group 0. Lifetime: 50.000 L80 B10.

Finish: Matte Traffic white RAL 9016

Dimensions: 1.200 x 300 x 59,3 mm

Installation: Surface
TECHNICAL SPECIFICATIONS:

Light output:	4.172 lm	°K :	3000
Plum:	34W	CRI :	80
Efficacy:	122,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER	Gear:	Adjustable DALI
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	31,1W		

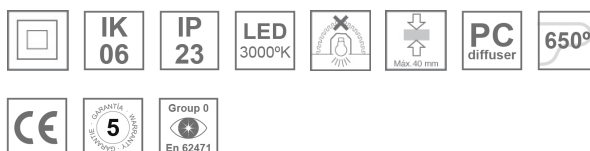Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

MCE1123050PR830DW MOD CUSTOM EFF 120X30 5000 WW PR DA WH

PHOTOMETRIC DATA :

