



MD1SF1400165830NW

**MUN DARK SUR Ø140 IP65 WW WH****Description:**

LAMP wall mounted indirect fixture model MUN DARK SUR Ø140 IP65. Manufactured of aluminium with Opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 3000K and IRC80. Electronic ON OFF gear included. IP65, IK08 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L90 B10. Available finishes: White and textured graphite.

Finish: Matte white RAL 9010**Weight:** 750 g**Installation:** Wall mounted**TECHNICAL SPECIFICATIONS:**

Light output:	440 lm	°K :	3000
Plum:	6,8W	CRI :	80
Efficacy:	64,7 lm/w	MacAdam:	3
Type:	MID POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90B10 (Ta=25°C)	Gear:	Electronic
Power:	5,5W		

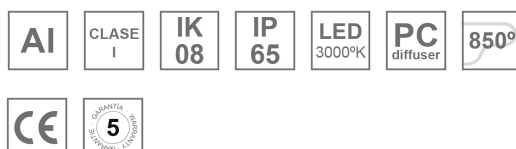Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

MUN DARK

MD1SF1400165830NW

MUN DARK SUR Ø140 IP65 WW WH

PHOTOMETRIC DATA :

