


ML1300SU10830NW



MUN LIGHT SUS Ø300 1000 WW WH.

Description:

Round suspended downlight model MUN LIGHT SUS Ø300, LAMP brand. Made of textured white painted extruded aluminum and with methacrylate opal diffuser. Model for LED LOW-POWER with 3000K color temperature, CRI 80 and control gear included. IP20 protection rating. Insulation class I. Lifetime: 50.000 L80 B10. Available finishes: White and textured graphite.

Finish: Texturised matte white RAL 9016


Weight: 2.258 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	761 lm	°K :	3000
Plum:	9,3W	CRI :	80
Efficacy:	81,8 lm/w	MacAdam:	<3
Type:	LOW POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	8W		

Light output tolerance +/- 10%

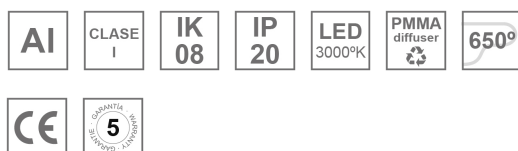**CUSTOM MADE OPTIONS:**

ML1300SU10830NW

MUN LIGHT SUS Ø300 1000 WW WH.

PHOTOMETRIC DATA :

