


MUN LIGHT

ML1480SU25830NW

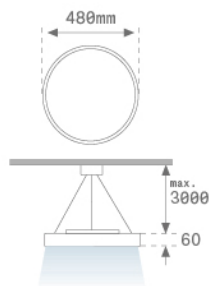

MUN LIGHT SUS Ø480 2500 WW WH.

Description:


Round suspended downlight model MUN LIGHT SUS Ø480, LAMP brand. Made of textured white painted extruded aluminum and with methacrylate opal diffuser. Model for LED LOW-POWER with 3000K color temperature, CRI 80 and control gear included. IP20 protection rating. Insulation class I. Lifetime: 50.000 L80 B10. Available finishes: White and textured graphite.

Finish: Texturised matte white RAL 9016

Weight: 4.716 g

Installation: Suspended
TECHNICAL SPECIFICATIONS:

Light output:	2.311 lm	°K :	3000
Plum:	23,2W	CRI :	80
Efficacy:	99,6 lm/w	MacAdam:	<3
Type:	LOW POWER OSRAM	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	20W		

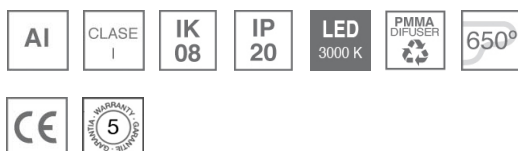**CUSTOM MADE OPTIONS:**

MUN LIGHT

ML1480SU25830NW

MUN LIGHT SUS Ø480 2500 WW WH.

PHOTOMETRIC DATA :

