


## ML2SF35MOPR930DB



## MUN LIGHT G2 SF Ø350 MO PRISM 9WW DA BK

**Description:**

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø350 MO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

**Finish:** Texturised matte graphite RAL 7021

**Weight:** 1.600 g

**Installation:** Surface


**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 2.003 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 18,5W                    | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 108,3 lm/w               | <b>R9 :</b>          | 51               |
| <b>UGR:</b>          | <19                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | MID POWER                | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 50.000 L80 B10 (Ta=25°C) | <b>Gear:</b>         | Adjustable DALI2 |
| <b>Power:</b>        | 16,6W                    |                      |                  |

*Light output tolerance +/- 10%*

**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

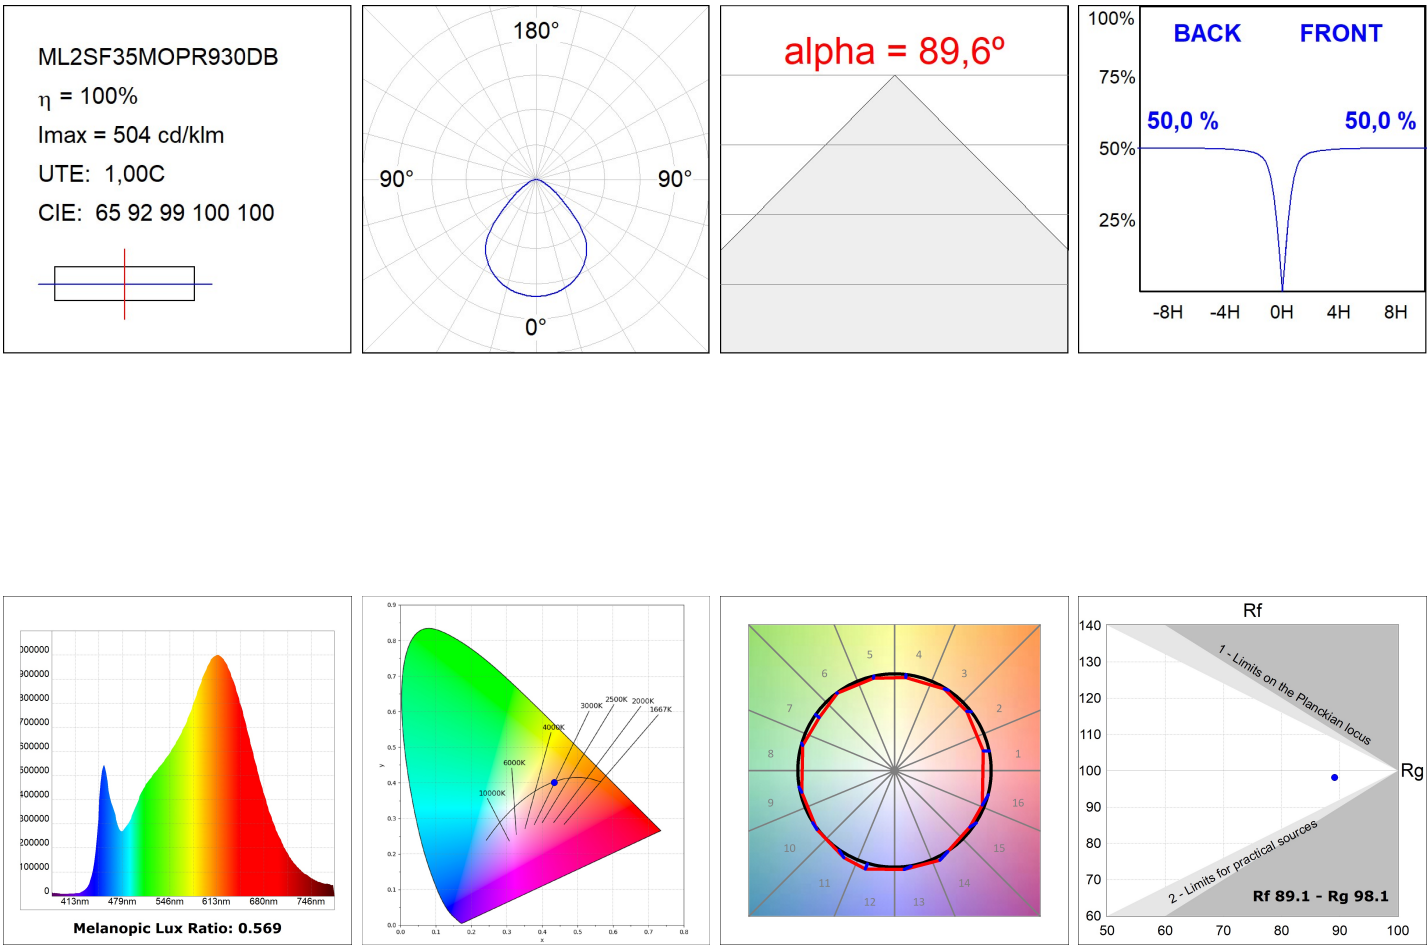

MUN LIGHT

ACCESORIES :

Suspension



Product code:

ML2SUEMSF1500DB

ML2SUEMSF3000DB

Description:

MUN LIGHT G2 ACC SUSP ELMEC 1500MM D B

MUN LIGHT G2 ACC SUSP ELMEC 3000MM D B