


## ML2SF45LOPR930DB



## MUN LIGHT G2 SF Ø450 LO PRISM 9WW DA BK

**Description:**

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø450 LO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

**Finish:** Texturised matte graphite RAL 7021


**Weight:** 2.730 g

**Installation:** Surface

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.820 lm	<b>°K :</b>	3000
<b>Plum:</b>	16,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	108,3 lm/w	<b>R9 :</b>	51
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI2
<b>Power:</b>	15,9W		


*Light output tolerance +/- 10%*

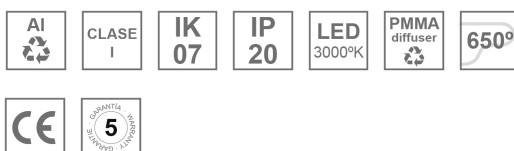**CUSTOM MADE OPTIONS:**

ML2SF45LOPR930DB

MUN LIGHT G2 SF Ø450 LO PRISM 9WW DA BK

PHOTOMETRIC DATA :

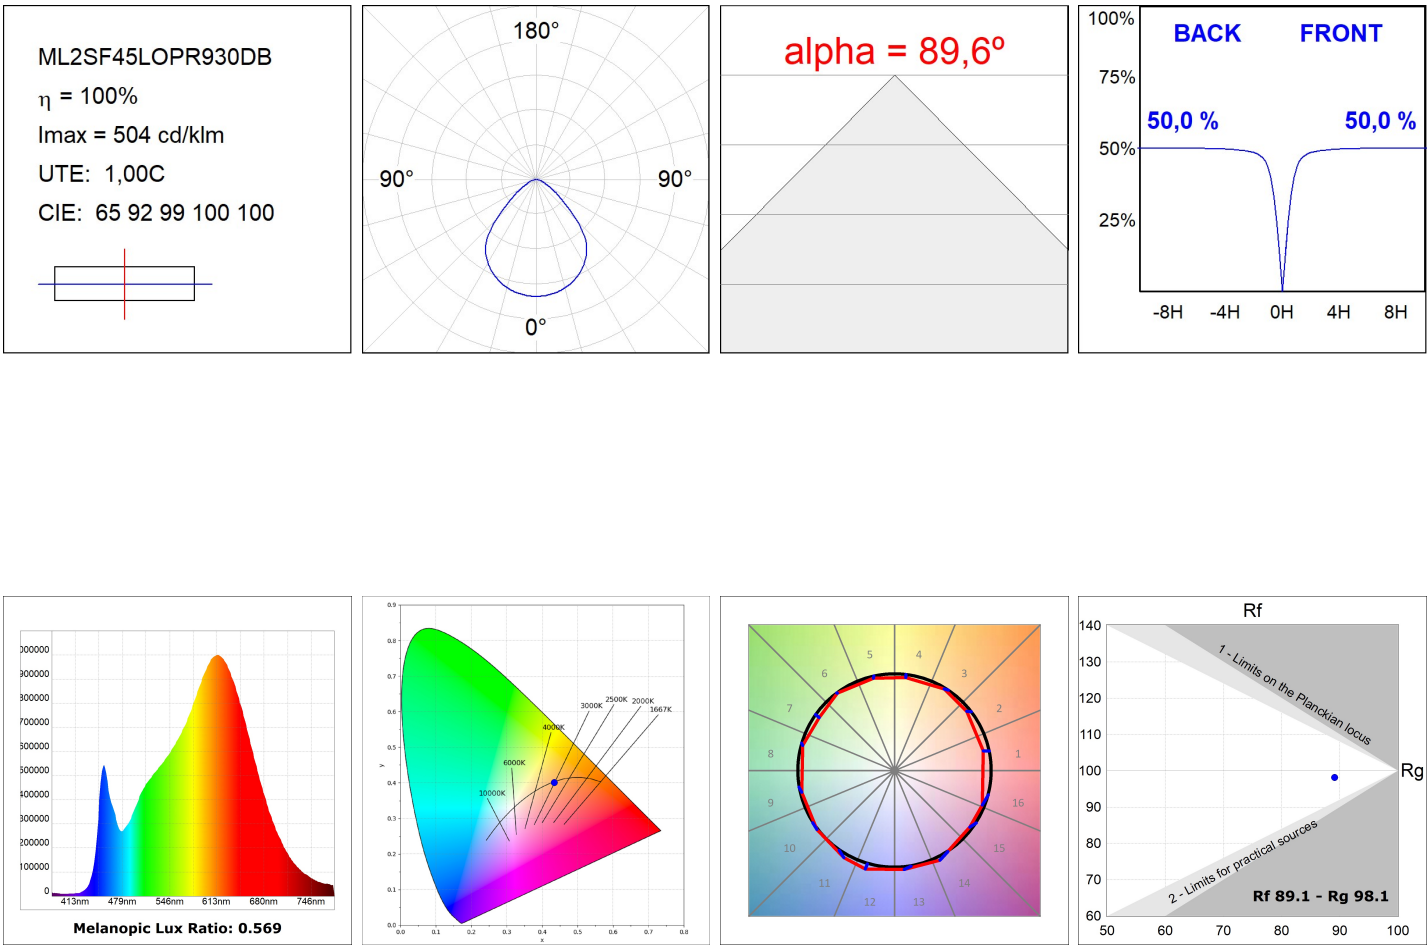

MUN LIGHT

ACCESORIES :

Suspension



Product code:

ML2SUEMSF1500DB  
ML2SUEMSF3000DB

Description:

MUN LIGHT G2 ACC SUSP ELMEC 1500MM D B  
MUN LIGHT G2 ACC SUSP ELMEC 3000MM D B