Product datasheet

MINI SHOT LED

MN215SP830NG


ø127

250



200 mm

ø122



Description:

Outdoor spotlight model MINI SHOT LED 1600, LAMP brand. Made of lacquered aluminium injection with electro coating treatment and tempered glass, stainless steel screws and silicone joints. Model for LED HI-POWER, 3000K colour temperature, CRI 80 and control gear included. With Spot optics. IP65, IK06 protection rating. Insulation class II. Lifetime: 60. 000 L90B10. BUG Rate: B0 U0 G0, ULOR: 0%. Available finishes: anthracite and textured grey

Finish: Texturised grey


Weight: 3.188 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.146 lm	⁰K :	3000
Plum:	11,9W	CRI :	80
Efficacy:	96,3 lm/w	MacAdam:	3
Туре:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	10W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


MINI SHOT LED

MN215SP830NG

SHOT 120 G2 1500 WW SP GR.



PHOTOMETRIC DATA :

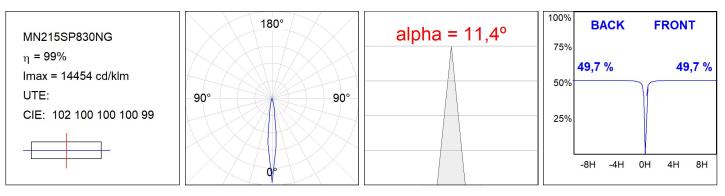

Product datasheet

MINI SHOT LED

ACCESORIES :

Optical



Product code: MSSC134B Description: SHOT 120 ACC. ANTIGLARE SCREEN. Worktitude for light