Product datasheet

MINI SHOT LED

MN240SP840NG

SHOT 120 G2 3800 NW SP GR.

Description:

Outdoor spotlight model SHOT 120 3800, LAMP brand. Made of texturised gris lacquered aluminium injection with electro coating treatment and tempered glass, stainless steel screws and silicone joints. Model for LED HI-POWER, 4000K colour temperature, CRI 80 and control gear included. With Spot optics. IP65, IK06 protection rating. Insulation class II. Lifetime: 60. 000 L90B10. BUG Rate: B0 U0 G0, ULOR: 0%. Available finishes: anthracite and textured grey



Finish: Texturised grey

Weight: 3.212 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	3.032 lm	**ºK :**	4000
Plum:	33,5W	**CRI :**	80
Efficacy:	90,5 lm/w	**MacAdam:**	3
Type:	HIGH POWER LED	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	60.000 L90 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	30W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

MINI SHOT LED

MN240SP840NG **SHOT 120 G2 3800 NW SP GR.**

PHOTOMETRIC DATA :

MN240SP840NG
η = 99%
Imax = 15011 cd/klm
UTE:
CIE: 103 100 100 100 99



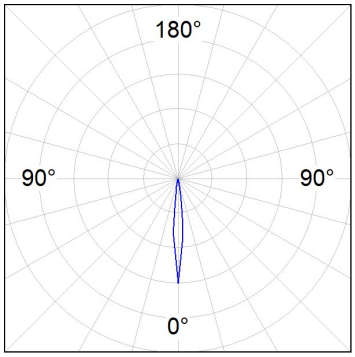

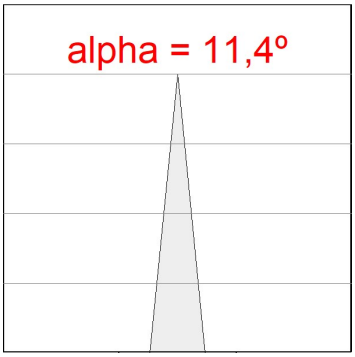

H (m)	D (m)	Emax	Emed
1	0,20	45195	30094
2	0,40	11299	7523
3	0,60	5022	3344
4	0,80	2825	1881

ACCESORIES :

Optical

Product code:	Description:
MSSC134B	SHOT 120 ACC. ANTIGLARE SCREEN.

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU