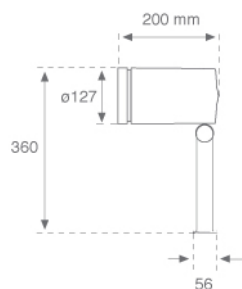


MINI SHOT LED

MN2BR30SP830NG



SHOT 120 G2 BR 2900 WW SP GR.

Description:

Outdoor spotlight model SHOT 120 BR 2900, LAMP brand. Made of lacquered aluminium injection with electro coating treatment and tempered glass, stainless steel screws and silicone joints. Model for LED HI-POWER, 3000K colour temperature, CRI 80 and control gear included. With Spot optics. IP65, IK06 protection rating. Insulation class II. Lifetime: 60. 000 L90B10. BUG Rate: B0 U0 G0, ULOR: 0%. Available finishes: anthracite and textured grey

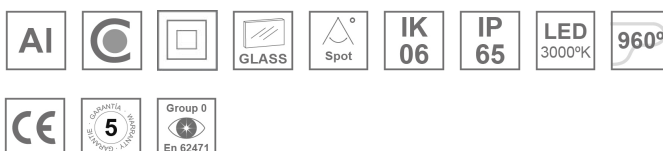
Finish: Texturised grey

Weight: 2.816 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.215 lm	°K :	3000
Plum:	23W	CRI :	80
Efficacy:	96,3 lm/w	MacAdam:	3
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	20W		

Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:

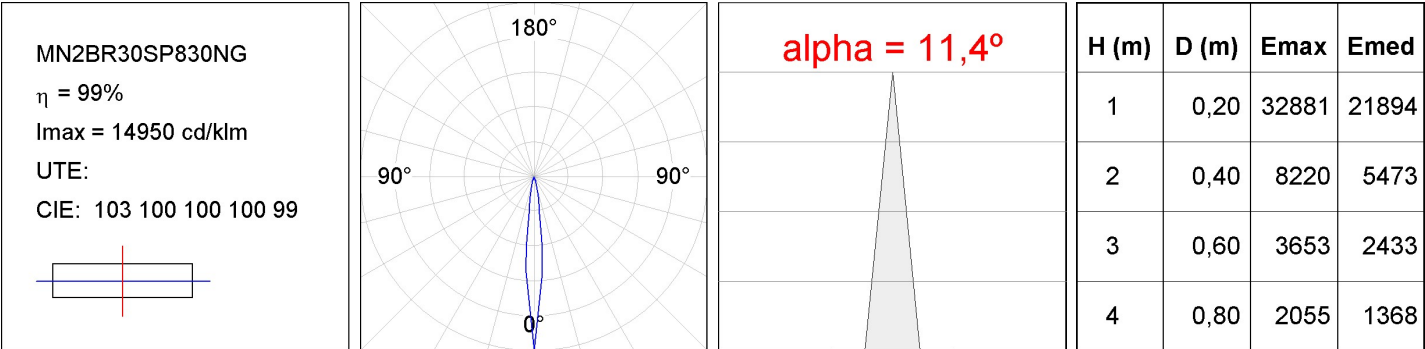


MINI SHOT LED

MN2BR30SP830NG

SHOT 120 G2 BR 2900 WW SP GR.

PHOTOMETRIC DATA :




ACCESORIES :
Assembly**Product code:**

MSFIC

Description:


SHOT 120 ACC. FIXATION POLE BASE

**Product code:**

MSFTSQG

Description:


SHOT 120 ACC. FIXATION PATTERN.

**Product code:**

MSPO1000A

Description:


SHOT 120 ACC. 1M POLE ANT.

**Product code:**

MSPO1000G

Description:


SHOT 120 ACC. 1M POLE GR.

**Product code:**

MSPO2500A

Description:


SHOT 120 ACC. 2,5M POLE ANT.

**Product code:**

MSPO2500G

Description:


SHOT 120 ACC. 2,5M POLE GR.

ACCESORIES :
Support**Product code:**

MSAR1000A

Description:


SHOT 120 ACC. WALL ARM ANT.

**Product code:**

MSAR1000G

Description:

SHOT 120 ACC. WALL ARM GR.

**Product code:**

MSSPM

Description:

SHOT 120 BRACKET ACC. SPIKE.

ACCESORIES :

Optical



Product code:

MSSC134B

Description:

SHOT 120 ACC. ANTIGLARE SCREEN.