Product datasheet

MOODY

MO2SU20MF840NBW

MOODY G2 SUS 2000 NW MFL BK/WH.

Description:

Suspended downlight modeMOODY G2 SUS 2000 NW MFL BK/WH. Lamp brand. Body made of white aluminium extrusion, with MFL polycarbonate reflector, and black trim ring, with high visual comfort (UGR <19).Model for COB LEDs with neutral white colour temperature and built-in electronic equipment. With IP20 degree of protection. Insulation class I.



Finish: Matte white RAL 9010

Weight: 640 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.592 lm	**ºK :**	4000
Plum:	20,5W	**CRI :**	80
Efficacy:	77,7 lm/w	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	18W		

Light output tolerance +/- 10%

AI · CLASE I · Medium Flood · IP 20 · LED 4000 K · 850º · CE · 5 GARANTÍA

CUSTOM MADE OPTIONS:

1-10V · CRI · lm · LED RETAIL · DALI · PUSH · TRIAC · K · WB

MOODY

MO2SU20MF840NBW **MOODY G2 SUS 2000 NW MFL BK/WH.**
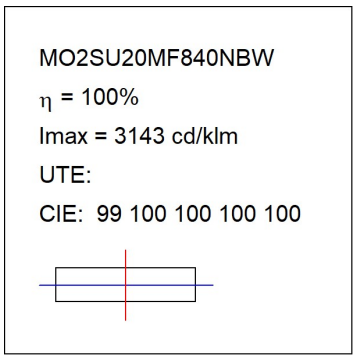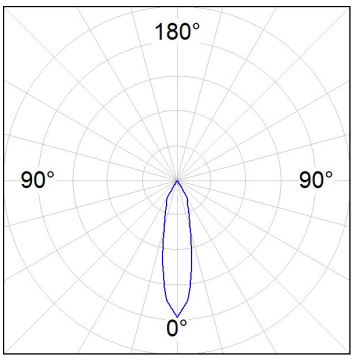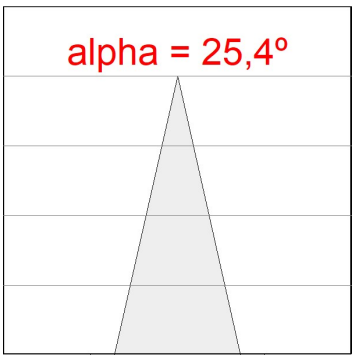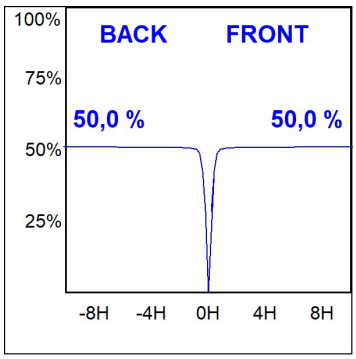
PHOTOMETRIC DATA :