

NI1451ST740NG



NIU LED STREET CL.I 4500 GR.

Description:

Urban luminaire NIU LED STREET CL. I 4500, LAMP brand. Made of texturised grey lacquered aluminium injection and flat tempered serigraphed glass. Model for HI-POWER LED with 4000K temperature, CRI 70 and control gear included. With street optics. IP66, IK10 protection rating. Insulation class I. To adapt to Ø60mm. Lifetime: 50. 000 L90. BUG Rate: B1 U1 G1, ULOR 0%.


Finish: Texturised grey

Weight: 12.450 g


Maximum surface exposed to wind: 0.18 M2

Installation: Integrated in light-pole
**TECHNICAL SPECIFICATIONS:**

Light output:	3.439 lm	°K :	4000
Plum:	52W	CRI :	70
Efficacy:	66,1 lm/w	MacAdam:	4
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 (Ta=25°C)	Gear:	Electronic
Power:	48W		

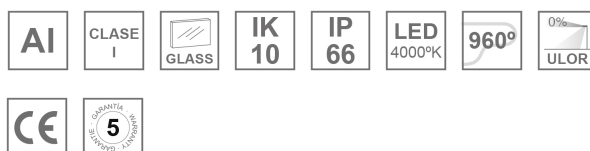Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

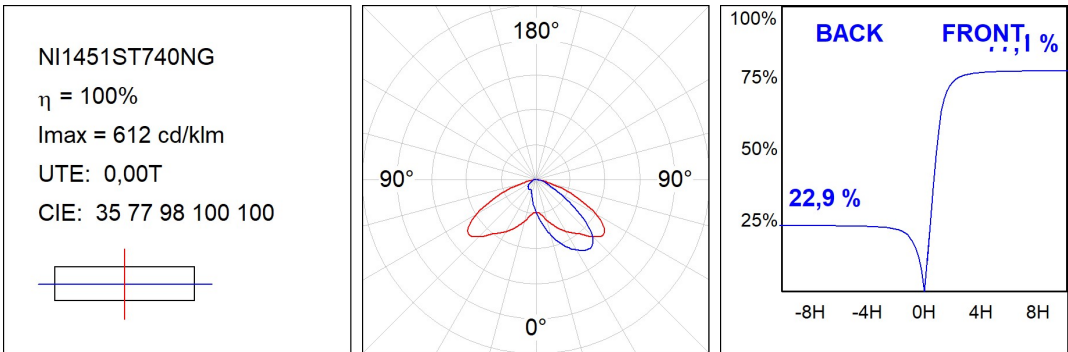

ACCESORIES :

Assembly



Product code:
NIARED60G

Description:
NIU ACC. IND Ø60 ARM



Product code:
NIPOAD76G

Description:
NIU ACC. Ø76 POLE ADAPTER

ACCESORIES :

Support



Product code:
NIAR650G

Description:
NIU ACC. WALL ARM



Product code:
NIPOBR135G

Description:
NIU ACC. IND Ø60-135 POLE CLAMP



Product code:
NIPOBR48G
NIPOBR60G

Description:
NIU ACC. Ø48 POLE BRACKET
NIU ACC. Ø60 POLE BRACKET