

NI1451SY740NG



NIU LED RSYM CL.I 4500 GR.

Description:


Urban luminaire NIU LED RSYM CL. I 4500, LAMP brand. Made of texturised grey lacquered aluminium injection and flat tempered serigraphed glass. Model for HI-POWER LED with 4000K temperature, CRI 70 and control gear included. With rotosymmetrical micro-reflectors. IP66, IK10 protection rating. Insulation class I. Includes architectural arm, to adapt to Ø60mm. Lifetime: 50. 000 L90. BUG Rate: B2 U1 G1, ULOR 0%.

Finish: Texturised grey

Weight: 16.600 g

Maximum surface exposed to wind: 0.18 M2


Installation: Integrated in light-pole



TECHNICAL SPECIFICATIONS:

Light output:	4.068 lm	°K :	4000
Plum:	52W	CRI :	70
Efficacy:	78,2 lm/w	MacAdam:	4
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 (Ta=25°C)	Gear:	Electronic
Power:	48W		


Light output tolerance +/- 10%

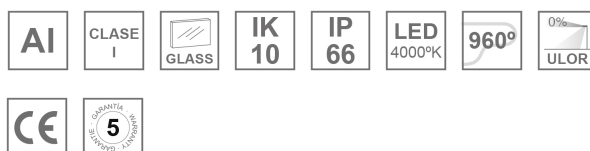

CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

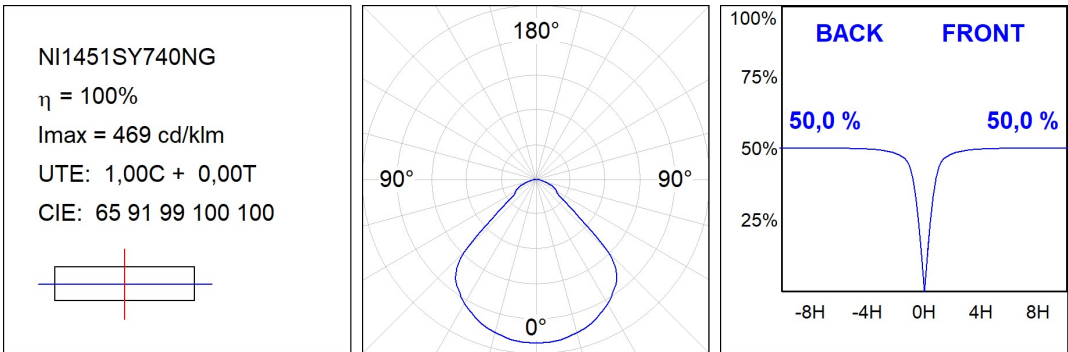

ACCESORIES :

Assembly



Product code:

NIPOAD76G

Description:

NIU ACC. Ø76 POLE ADAPTER