

NI1452SY740NG



NIU LED RSYM CL.II 4500 GR.


Description:

Urban luminaire NIU LED RSYM CL. II 4500, LAMP brand. Made of texturised grey lacquered aluminium injection and flat tempered serigraphed glass. Model for HI-POWER LED with 4000K temperature, CRI 70 and control gear included. With rotosymmetrical micro-reflectors. IP66, IK10 protection rating. Insulation class II. Includes architectural arm, to adapt to Ø60mm. Lifetime: 50.000 L90. BUG Rate: B2 U1 G1, ULOR 0%.

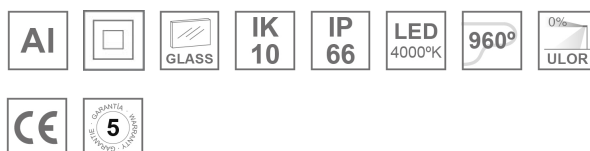
Finish: Texturised grey

Weight: 16.600 g

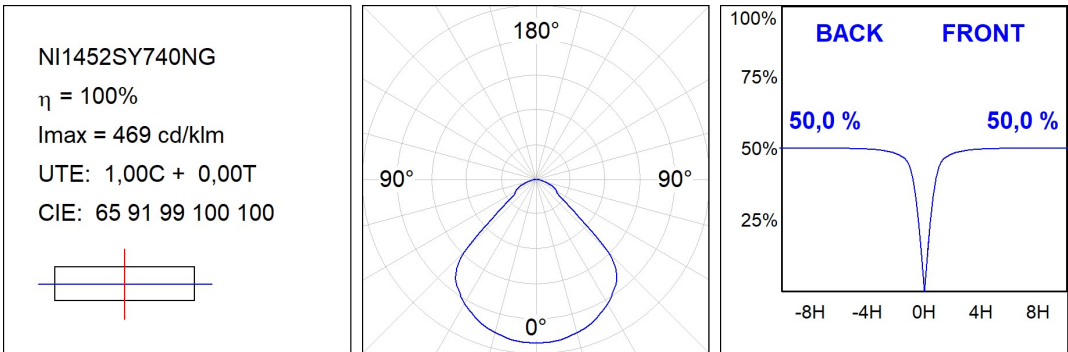
Maximum surface exposed to wind: 0.18 M2

Installation: Integrated in light-pole
**TECHNICAL SPECIFICATIONS:**

Light output:	4.068 lm	°K :	4000
Plum:	52W	CRI :	70
Efficacy:	78,2 lm/w	MacAdam:	4
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 (Ta=25°C)	Gear:	Electronic
Power:	48W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :



ACCESORIES :

Assembly



Product code:

NIPOAD76G

Description:

NIU ACC. Ø76 POLE ADAPTER