

## NI1901ST740NG



## NIU LED STREET CL.I 9000 GR.

**Description:**

Urban luminaire NIU LED STREET CL. I 9000, LAMP brand. Made of texturised grey lacquered aluminium injection and flat tempered serigraphed glass. Model for HI-POWER LED with 4000K temperature, CRI 70 and control gear included. With street optics. IP66, IK10 protection rating. Insulation class I. To adapt to Ø60mm. Lifetime: 50. 000 L90. BUG Rate: B1 U1 G1, ULOR 0%.


**Finish:** Texturised grey

**Weight:** 12.450 g


**Maximum surface exposed to wind:** 0.18 M2

**Installation:** Integrated in light-pole
**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	6.736 lm	<b>°K :</b>	4000
<b>Plum:</b>	104W	<b>CRI :</b>	70
<b>Efficacy:</b>	64,7 lm/w	<b>MacAdam:</b>	4
<b>Type:</b>	HIGH POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L90 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	97W		

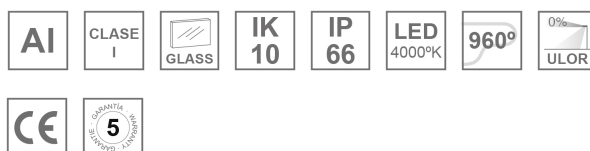*Light output tolerance +/- 10%*
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

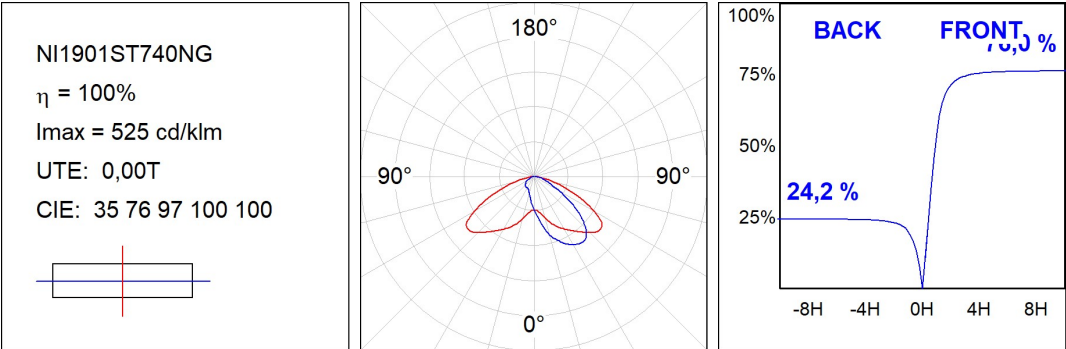

---

**ACCESORIES :**

**Assembly**



**Product code:**

NIARED60G

**Description:**

NIU ACC. IND Ø60 ARM



**Product code:**

NIPOAD76G

**Description:**

NIU ACC. Ø76 POLE ADAPTER

---

**ACCESORIES :**

**Support**



**Product code:**

NIAR650G

**Description:**

NIU ACC. WALL ARM



**Product code:**

NIPOBR135G

**Description:**

NIU ACC. IND Ø60-135 POLE CLAMP



**Product code:**

NIPOBR48G

**Description:**

NIU ACC. Ø48 POLE BRACKET

NIPOBR60G

NIU ACC. Ø60 POLE BRACKET