


OW1131ST840NG



OWL CL.I 12500 8NW GR.

Description:

Street luminaire model OWL CL. I 12500, LAMP brand. Body manufactured of texturised grey lacquered aluminum injection, with serigraphed tempered flat glass. Passive dissipation through the body. Model for HI-POWER LED, 4000K color temperature, CRI80 and control gear included and control gear included. With street optics. IP66, IK07 protection rating. Insulation class I. Its ball joint allows swiveling the light between 10° and -10°. Lifetime: 100.000 L90 B10. BUG Rate: B2 U0 G2, ULOR 0%.




Finish: Texturised grey**Weight:** 6.960 g**Maximum surface exposed to wind:** 0.19 M2**Installation:** Integrated in light-pole**TECHNICAL SPECIFICATIONS:**

Light output:	11.228 lm	°K :	4000
Plum:	103W	CRI :	80
Efficacy:	109 lm/w	MacAdam:	4
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	100.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	94W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

H (m)	D (m)	E _{max}	E _{med}
1	5,41	4370	466
2	10,81	1093	117
3	16,22	486	52
4	21,63	273	29

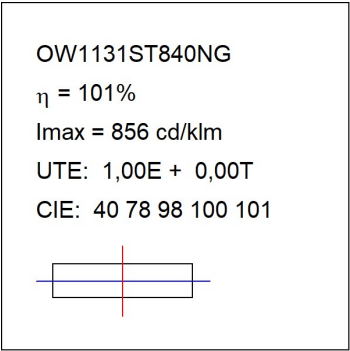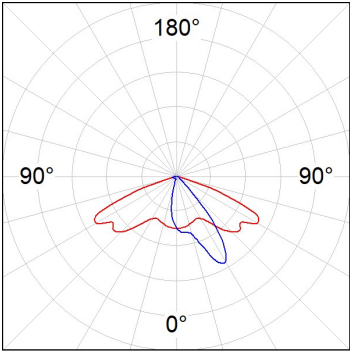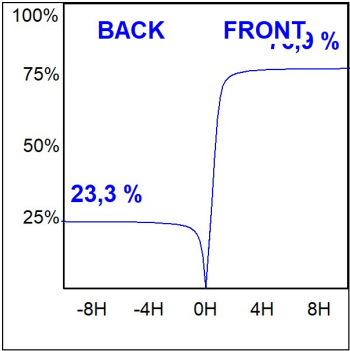

OW1131ST840NG
 $\eta = 101\%$
 $I_{max} = 856 \text{ cd/klm}$
UTE: 1,00E + 0,00T
CIE: 40 78 98 100 101



ACCESORIES :

Support



Product code:

OWAR1000G

Description:

OWL ACC.WALL ARM 1M GR.