


OWL1182ST830NG



OWL CL.II 17500 8WW GR.

Description:

Street luminaire model OWL CL. II 17500, LAMP brand. Body manufactured of texturised grey lacquered aluminum injection, with serigraphed tempered flat glass. Passive dissipation through the body. Model for HI-POWER LED, 3000K color temperature, CRI80 and control gear included and control gear included. With street optics. IP66, IK07 protection rating. Insulation class II. Its ball joint allows swiveling the light between 10° and -10°. Lifetime: 100.000 L90 B10. BUG Rate: B2 U0 G2, ULOR 0%.

Finish: Texturised grey

Weight: 6.266 g


Maximum surface exposed to wind: 0.19 M2

Installation: Integrated in light-pole
TECHNICAL SPECIFICATIONS:

Light output:	14.762 lm	°K :	3000
Plum:	135W	CRI :	80
Efficacy:	109,3 lm/w	MacAdam:	4
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	100.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	125W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

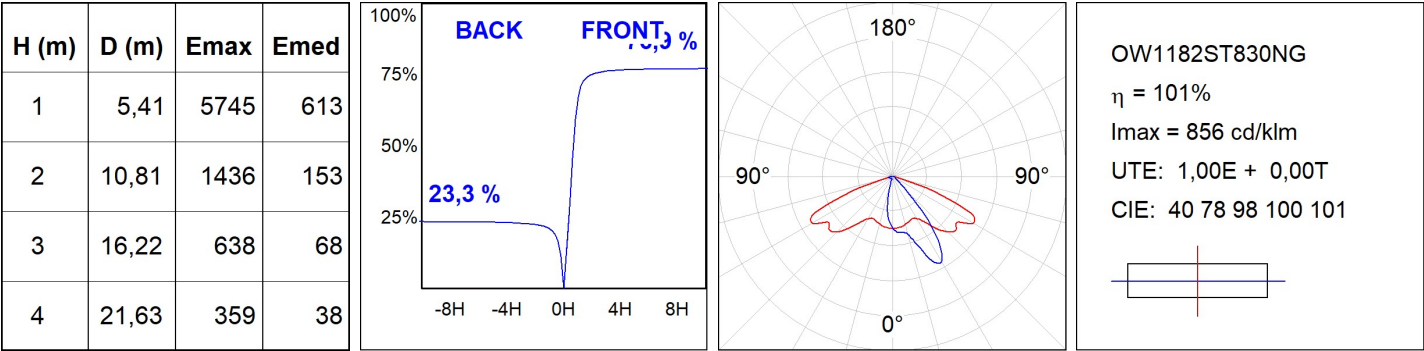

ACCESORIES :

Support



Product code:

OWAR1000G

Description:

OWL ACC.WALL ARM 1M GR.