


QBF41084MOPR840D



QUIET BAF FIL45 840 1950 OP COM NW DALI

Description:


LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET Baffle FIL45 840. Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, d0. LOW VOC and Low formaldehyde emissions. Luminaire model F41RE084MOPR840DW 4000K and CRI80. Electronic DALI gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 70.000 L80 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.512 lm	°K :	4000
Plum:	15,5W	CRI :	80
Efficacy:	97,6 lm/w	MacAdam:	3
UGR:	<16	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	13,4W		

Light output tolerance +/- 10%

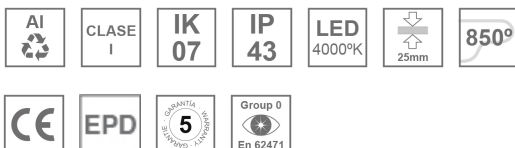

CUSTOM MADE OPTIONS:






QBF41084MOPR840D

QUIET BAF FIL45 840 1950 OP COM NW DALI

PHOTOMETRIC DATA :


F41RE084MOPR840NW
 $\eta = 99\%$
 $I_{max} = 968 \text{ cd/klm}$
UTE: 0,99A
CIE: 90 100 100 100 99

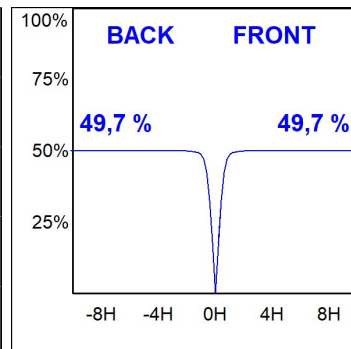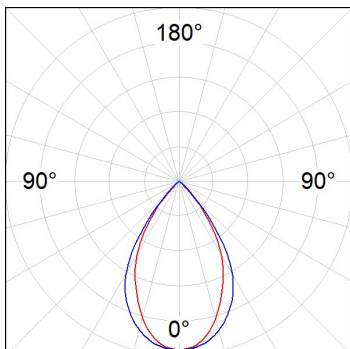

Essential Colours



Trendy Colours

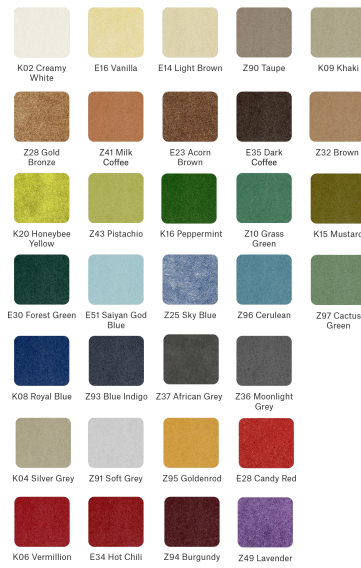

Prime Colours

