


QBF41112MOPR830D



QUIET BAF FIL45 1120 2600 OP COM WW DAL

Description:

LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET BAFFLE FIL45 1120. Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, d0. LOW VOC and Low formaldehyde emissions. Luminaire model F41RE112MOPR830DW 3000K and CRI80. Electronic DALI gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 70.000 L80 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.922 lm	°K :	3000
Plum:	20,6W	CRI :	80
Efficacy:	93,3 lm/w	MacAdam:	3
UGR:	<16	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	17,9W		

Light output tolerance +/- 10%




CUSTOM MADE OPTIONS:



QBF41112MOPR830D

QUIET BAF FIL45 1120 2600 OP COM WW DAL

PHOTOMETRIC DATA :

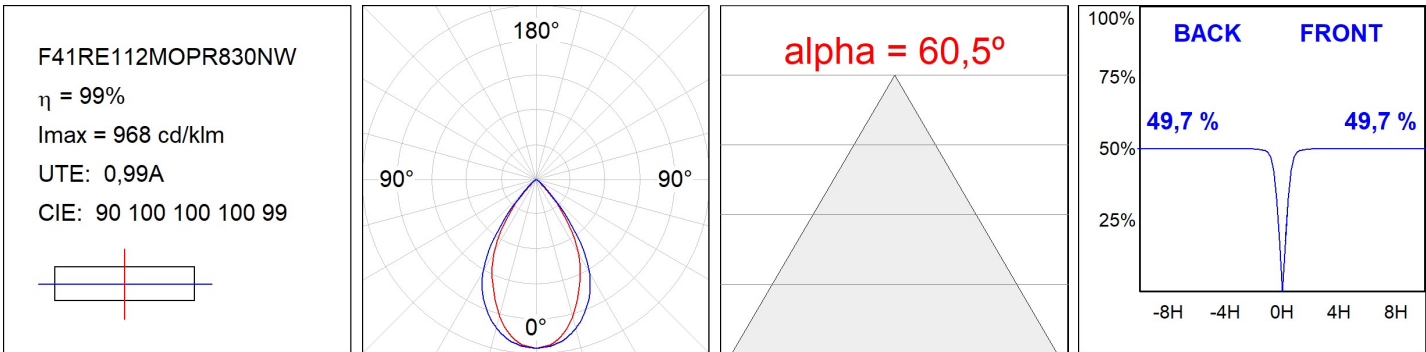

Essential Colours



Trendy Colours



Prime Colours

