


QBF41112MOPR840N



QUIET BAF FIL45 1120 2600 OP COM NW

Description:

LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET BAFFLE FIL45 1120. Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, d0. LOW VOC and Low formaldehyde emissions. Luminaire model F41RE112MOPR840NW 4000K and CRI80. Electronic ON OFF gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 70.000 L80 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	2.017 lm	°K :	4000
Plum:	20,9W	CRI :	80
Efficacy:	96,5 lm/w	MacAdam:	3
UGR:	<16	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Electronic
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	17,9W		

Light output tolerance +/- 10%




CUSTOM MADE OPTIONS:



QBF41112MOPR840N

QUIET BAF FIL45 1120 2600 OP COM NW

PHOTOMETRIC DATA :

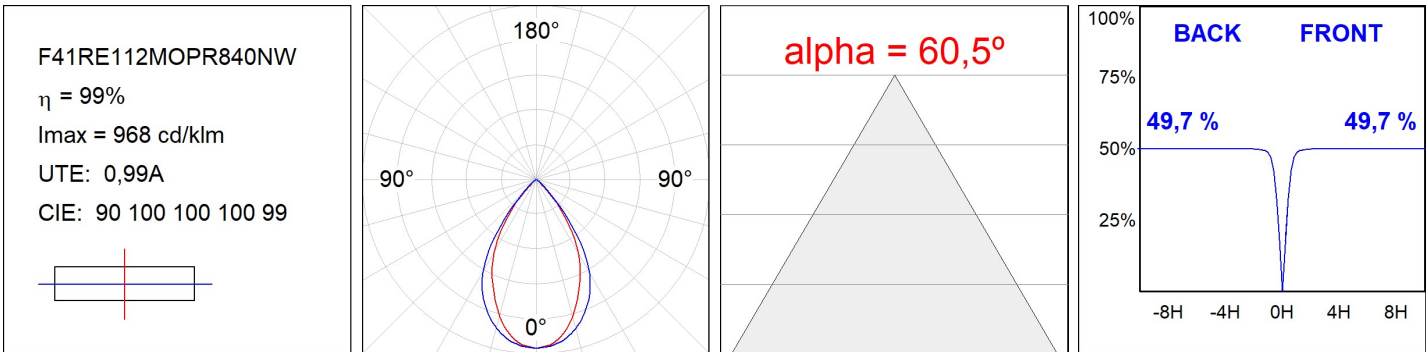

Essential Colours



Trendy Colours



Prime Colours

