


QRK2130OP830N



QUIET RD KOMBIC 150 2800 WW OP

Description:


LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET RD KOMBIC 150 .Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, d0. LOW VOC and Low formaldehyde emissions. Luminaire model K21RD3040OP830NWW 3000K and CRI80. Electronic ON OFF gear included. IP43 rate. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.

Installation: Suspended

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 2.074 lm | °K : | 3000 |
| Plum: | 19,9W | CRI : | 80 |
| Efficacy: | 104,2 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 17,6W | | |

Light output tolerance +/- 10%

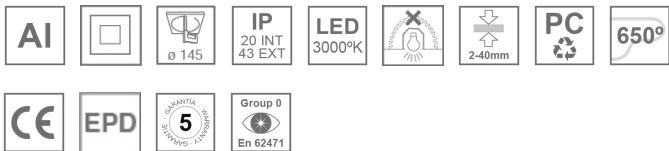


CUSTOM MADE OPTIONS:



QRK2130OP830N

QUIET RD KOMBIC 150 2800 WW OP

PHOTOMETRIC DATA :

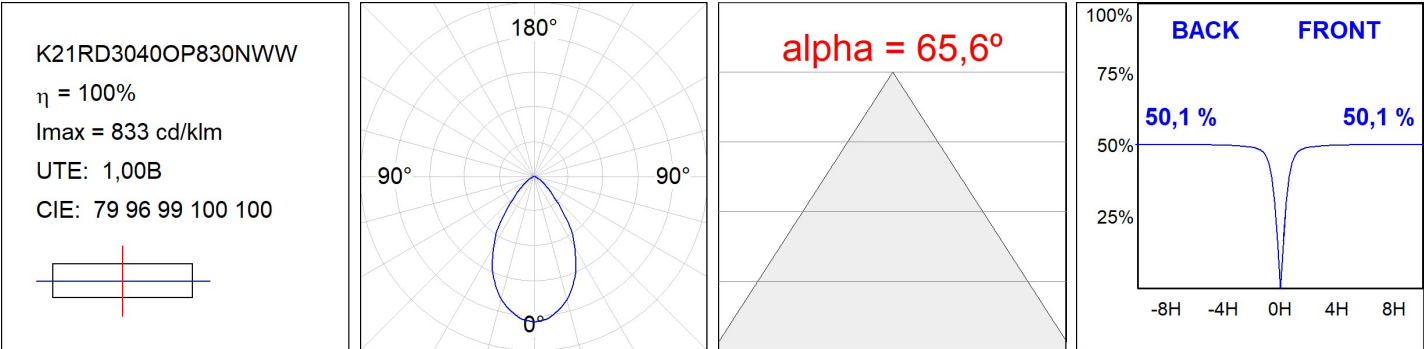

Essential Colours



Trendy Colours



Prime Colours

