

QRK2130WF830N



QUIET RD KOMBIC 150 2800 WW WFL

Description:

LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET RD KOMBIC 150 .Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, dø. LOW VOC and Low formaldehyde emissions. Luminaire model K21RD3040WF830NWW 3000K and CRI80. Electronic ON OFF gear included. IP43 rate. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.




Installation: Suspended

TECHNICAL SPECIFICATIONS:

| Light output: | 1.667 lm | °K : | 3000 |
|---------------|--------------------------|---------------|------------------|
| Plum: | 19,9W | CRI : | 80 |
| Efficacy: | 83,8 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Туре: | СОВ | Gear: | Electronic |
| LED Lifetime: | 50.000 L70 B10 (Ta=25ºC) | | |
| Power: | 17,6W | | |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:






QRK2130WF830N

QUIET RD KOMBIC 150 2800 WW WFL

PHOTOMETRIC DATA :

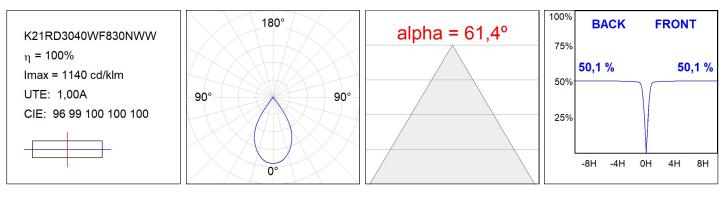



A027 Light Green

A224 Ma

A227 Lotu Blue

A206 Litm Red



Tel. +34937366800 Web www.lamp.es LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es