


RI140RD02SP930NW



RING 40 RD 150 WW SP WH.

Description:

Fixed individual round downlight model RING 40 RD 150, LAMP brand. Made of aluminium. Model for HIGH POWER, 3000K color temperature and CRI 90. SPOT polycarbonate optics with high visual comfort thanks to the flush position of the lamp. IP43 protection rating. Insulation class I. With built-in electronic equipment (700mA). Lifetime: 100.000 L80 B10. Available finishes: Matt white (RAL 9010), Matt black (RAL 9011).

Finish: Matte white RAL 9010


Weight: 101 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	131 lm	°K :	3000
Plum:	3,1W (700MA)	CRI :	90
Efficacy:	42,3 lm/w	MacAdam:	3
Type:	HIGH POWER LED	Power Supply:	100-240V 50/60Hz
LED Lifetime:	100.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	2W		

Light output tolerance +/- 10%

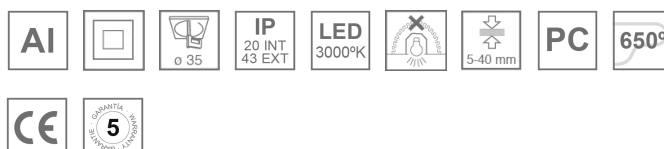

PHOTOMETRIC DATA :

