

ST117030WF830NBW



STORMBELL 3000 WW WFL WH.


Description:

LAMP pendant luminaire model STORMBELL 3000 . Body made of extruded and die-cast aluminium. COB model with polycarbonate reflector flood, with colour temperature 3000K and CRI80. Electronic ON OFF gear included. IP20, IK07 ratings. Insulation Class I. LED life time: 50.000 L80 B10. Available finishes: White and black.

Finish: Shiny white RAL 9010

Weight: 4.504 g

Installation: Suspended

**TECHNICAL SPECIFICATIONS:**

Light output:	2.492 lm	°K :	3000
Plum:	26,3W	CRI :	80
Efficacy:	94,7 lm/w	MacAdam:	<3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	25W		


Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**

ST117030WF830NBW

STORMBELL 3000 WW WFL WH.

PHOTOMETRIC DATA :

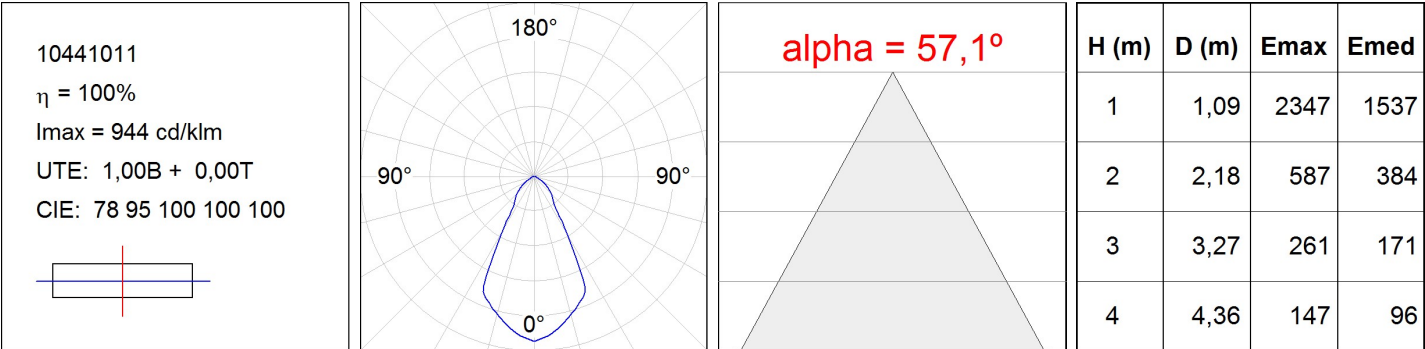

ACCESORIES :

Optical



Product code:

ST102OP

Description:

STORMBELL ACC. OPAL GLASS



Product code:

ST102TR

Description:

STORMBELL ACC. TRANS GLASS



Product code:

STBE420B

Description:

STORMBELL ACC. BELL BK.



Product code:

STBE420OP

Description:

STORMBELL ACC. BELL OPAL




Product code:

STBE420W

Description:

STORMBELL ACC. BELL WH.



Product code:

STHO102B

Description:

STORMBELL ACC. HONEYCOMB GRILLE