Product datasheet

STORMBELL

LAMP Worktitude for light


ST117050FL840NOB



STORMBELL DECO 5000 NW FL BK.

Description:

LAMP pendant luminaire model STORMBELL 5000 . Body made of extruded and die-cast aluminium. COB model with polycarbonate reflector flood, with colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP20, rating. Insulation Class I. LED life time: 50.000 L80 B10. Available finishes: White and black.



Finish: Shiny black RAL 9011

Weight: 4.592 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

 Light output:
 4.267 lm
 °K:
 4000

 Plum:
 47,4W
 CRI:
 80

 Efficacy:
 90 lm/w
 MacAdam:
 <3</td>

Type: COB **Power Supply:** 100-240V 50/60Hz

LED Lifetime: 50.000 L80 B10 (Ta=25°C) Gear: Electronic

Power: 44W

Light output tolerance +/- 10%















CUSTOM MADE OPTIONS:









Data according to regulations 2019/2020/EU and 2019/2015/EU


















STORMBELL





ST117050FL840NOB

STORMBELL DECO 5000 NW FL BK.

PHOTOMETRIC DATA:





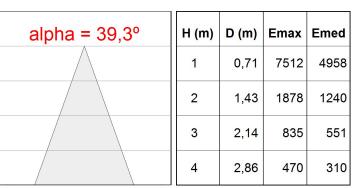

STORMBELL



ACCESORIES:

Optical



Product code:

ST102OP



STORMBELL ACC. OPAL GLASS



Product code:

ST102TR

Description:

STORMBELL ACC. TRANS GLASS



Product code:

STBE420B

Description:

STORMBELL ACC. BELL BK.



Product code:

STBE420OP

Description:

STORMBELL ACC. BELL OPAL



Product code:

STBE420W

Description:

STORMBELL ACC. BELL WH.



Product code:

STHO102B

ae:

Description:

STORMBELL ACC. HONEYCOMB GRILLE