Product datasheet

STORMBELL

ST117050FL840NOW

STORMBELL DECO 5000 NW FL WH.

Description:

LAMP pendant luminaire model STORMBELL DECO 5000 . Body made of extruded and die-cast aluminium. COB model with polycarbonate reflector flood, with colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP20, rating. Insulation Class I. LED life time: 50.000 L80 B10. Available finishes: White and black.

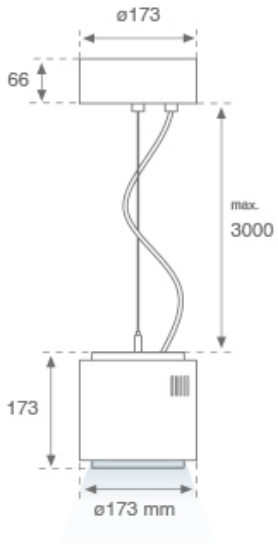

Finish: Shiny white RAL 9010

Weight: 4.592 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	4.267 lm	**ºK :**	4000
Plum:	47,4W	**CRI :**	80
Efficacy:	90 lm/w	**MacAdam:**	<3
Type:	COB	**Power Supply:**	100-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	44W		

Light output tolerance +/- 10%

AI · CLASE I · IP 20 · LED 4000 K · 960º

CUSTOM MADE OPTIONS:

1-10V · LED RETAIL · DALI · PUSH · TRIAC · K · WB

STORMBELL

ST117050FL840NOW **STORMBELL DECO 5000 NW FL WH.**

PHOTOMETRIC DATA :

10440020
η = 100%
Imax = 1765 cd/klm
UTE: 0,98A + 0,02T
CIE: 89 96 99 98 100



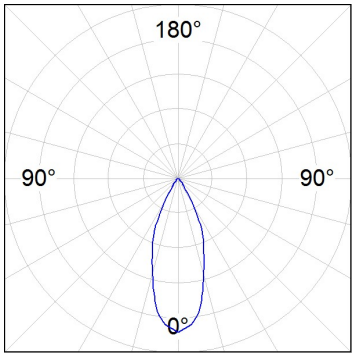

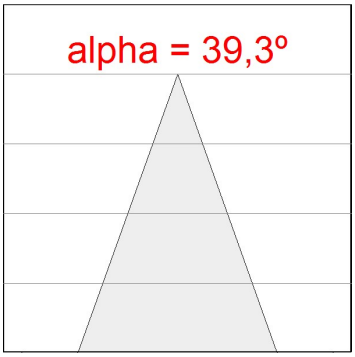

H (m)	D (m)	Emax	Emed
1	0,71	7512	4958
2	1,43	1878	1240
3	2,14	835	551
4	2,86	470	310

ACCESORIES :

Optical

Product code:	Description:
ST102OP	STORMBELL ACC. OPAL GLASS

Product code:	Description:
ST102TR	STORMBELL ACC. TRANS GLASS

Product code:	Description:
STBE420B	STORMBELL ACC. BELL BK.

Product code:	Description:
STBE420OP	STORMBELL ACC. BELL OPAL

Product code:	Description:
STBE420W	STORMBELL ACC. BELL WH.



Product code:	Description:
STHO102B	STORMBELL ACC. HONEYCOMB GRILLE

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU