

ST18SELOMF940DOPW



STORMBELL 80 DECO SU RE 1500 NW MF D O/W

Description:

Downlight to suspend model STORMBELL 80 DECO SU RE 1500 NW MFL DA OP/WH LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 4000K color temperature and CRI90. Aluminium reflector MEDIUM FLOOD, UGR<19. Luminaire with ceiling rose and electronic DALI equipment included. Insulation class II. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.



Finish: Texturised white RAL 9010

Weight: 800 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.467 lm	°K :	4000
Plum:	14,5W	CRI :	90
Efficacy:	101,2 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	12.2W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:







ST18SELOMF940DOPW

STORMBELL 80 DECO SU RE 1500 NW MF D O/W

PHOTOMETRIC DATA :

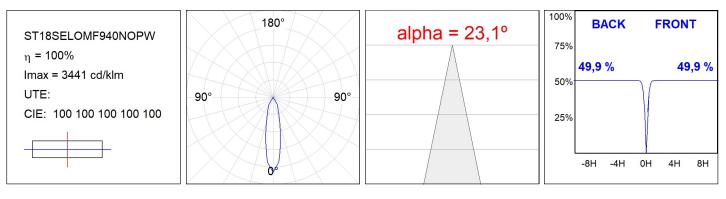

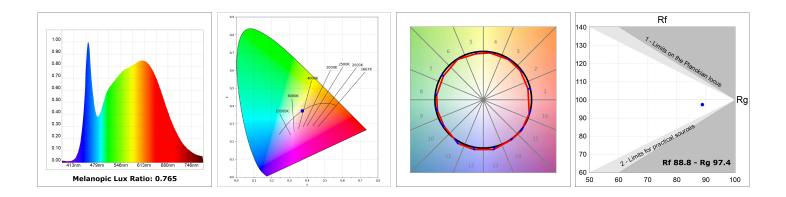







Product code: Description: S8BE363B1

ACC. BELL STORMBELL 80 Ø363x60 MA

Product code: S8BE363CK

Description: ACC. BELL STORMBELL 80 Ø363x60 CK

Data according to regulations 2019/2020/EU and 2019/2015/EU

Product datasheet





Product code: S8BE363PT

Description: ACC. BELL STORMBELL 80 Ø363x60 PT



S8BE363W

Description: ACC. BELL STORMBELL 80 Ø363x60 WH



Product code:

S8BE86B



Description: ACC. BELL STORMBELL 80 Ø86x50 BK



Product code: S8BE86B1

Description: ACC. BELL STORMBELL 80 Ø86x50 MA



Product code: S8BE86W

Description: ACC. BELL STORMBELL 80 Ø86x50 WH