

### ST18SELOSP930DBB



# STORMBELL 80 SU RE 1500 WW SP DA BK/BK

#### **Description:**

Downlight to suspend model STORMBELLMBELL 80 SU RE 1500 WW SP DA BK/BK LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 3000K color temperature and CRI90. Aluminium reflector SPOT, UGR<19. Luminaire with ceiling rose and electronic DALI equipment included. Insulation class II. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.



Finish: Texturised black RAL 9011 Weight: 800 g

Installation: Suspended

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.342 lm	<b>⁰Κ</b> :	3000
Plum:	14,5W	CRI :	90
Efficacy:	92,6 lm/w	R9 :	60
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	12.2W		

### Light output tolerance +/- 10%



# **CUSTOM MADE OPTIONS:**




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es




ST18SELOSP930DBB

STORMBELL 80 SU RE 1500 WW SP DA BK/BK

## PHOTOMETRIC DATA :

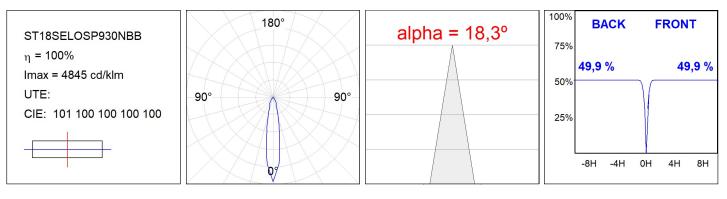

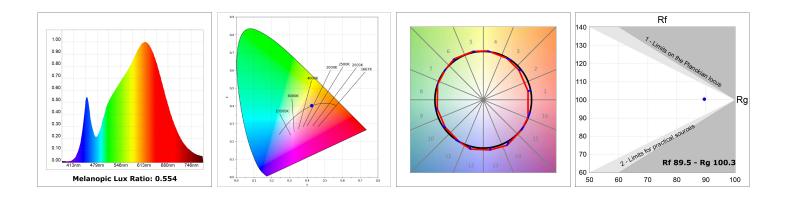







Product code: Description: S8BE363B1

ACC. BELL STORMBELL 80 Ø363x60 MA

Product code: S8BE363CK

Description: ACC. BELL STORMBELL 80 Ø363x60 CK

Data according to regulations 2019/2020/EU and 2019/2015/EU

### Product datasheet





Product code: S8BE363PT

Description: ACC. BELL STORMBELL 80 Ø363x60 PT



S8BE363W

Description: ACC. BELL STORMBELL 80 Ø363x60 WH



Product code:

S8BE86B



Description: ACC. BELL STORMBELL 80 Ø86x50 BK



Product code: S8BE86B1

Description: ACC. BELL STORMBELL 80 Ø86x50 MA



Product code: S8BE86W

Description: ACC. BELL STORMBELL 80 Ø86x50 WH