

## ST18SELOSP940NBW



## STORMBELL 80 SU RE 1500 NW SP BK/WH

#### **Description:**

Downlight to suspend model STORMBELLMBELL 80 SU RE 1500 NW SP BK/WH LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 4000K color temperature and CRI90. Aluminium reflector SPOT, UGR<19. Luminaire with ceiling rose and electronic equipment included. Insulation class II. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.



Finish: Texturised white RAL 9010 Weight: 800 g

Installation: Suspended

### **TECHNICAL SPECIFICATIONS:**

Light output:	1.431 lm	٩ <b>κ</b> :	4000
Plum:	14,5W	CRI :	90
Efficacy:	98,7 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	12.2W		

#### Light output tolerance +/- 10%



## **CUSTOM MADE OPTIONS:**








ST18SELOSP940NBW

STORMBELL 80 SU RE 1500 NW SP BK/WH

# **PHOTOMETRIC DATA :**

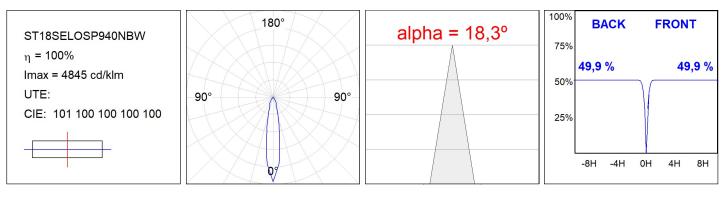

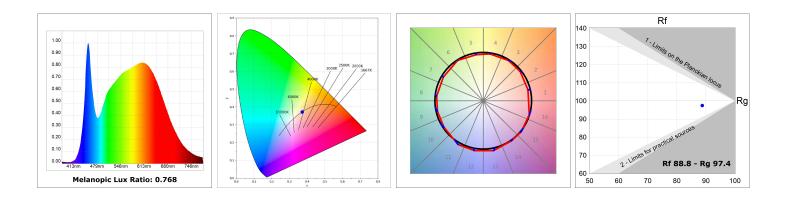

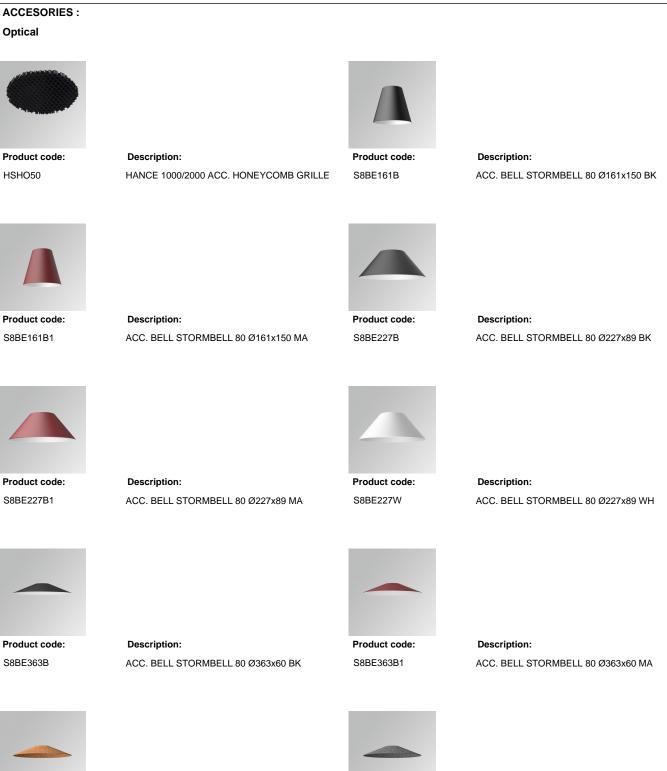

Product code: S8BE363CK

Description: ACC. BELL STORMBELL 80 Ø363x60 CK

Product code: S8BE363PT

Description: ACC. BELL STORMBELL 80 Ø363x60 PT

## Product datasheet





Product code: S8BE363W

Description: ACC. BELL STORMBELL 80 Ø363x60 WH



Product code: S8BE86B

Description: ACC. BELL STORMBELL 80 Ø86x50 BK



Product code:

S8BE86B1



Description: ACC. BELL STORMBELL 80 Ø86x50 MA



Product code: S8BE86W

Description: ACC. BELL STORMBELL 80 Ø86x50 WH