

ST18SELOWF940NBW



STORMBELL 80 SU RE 1500 NW WFL BK/WH

Description:

Downlight to suspend model STORMBELLMBELL 80 SU RE 1500 NW WFL BK/WH LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 4000K color temperature and CRI90. Aluminium reflector WIDE FLOOD. Luminaire with ceiling rose and electronic equipment included. Insulation class II. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.



Finish: Texturised white RAL 9010

Weight: 800 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.476 lm	⁰K :	4000
Plum:	14,5W	CRI :	90
Efficacy:	101,8 lm/w	R9 :	65
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Power Supply:	220-240V 50/60Hz
Power:	12.2W	Gear:	Electronic

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es




ST18SELOWF940NBW


STORMBELL 80 SU RE 1500 NW WFL BK/WH

PHOTOMETRIC DATA :

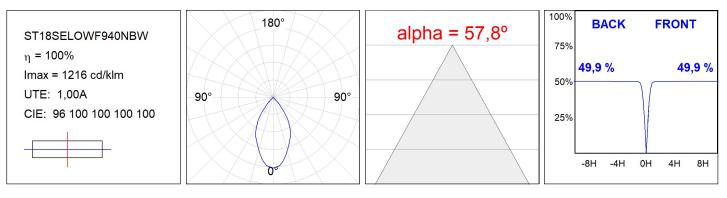

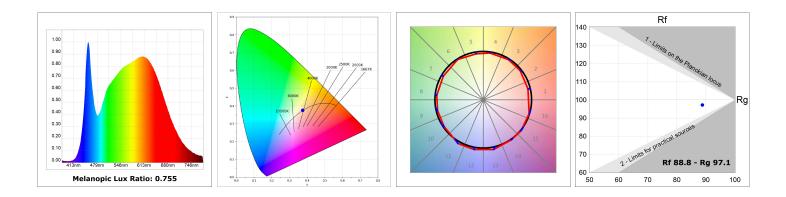



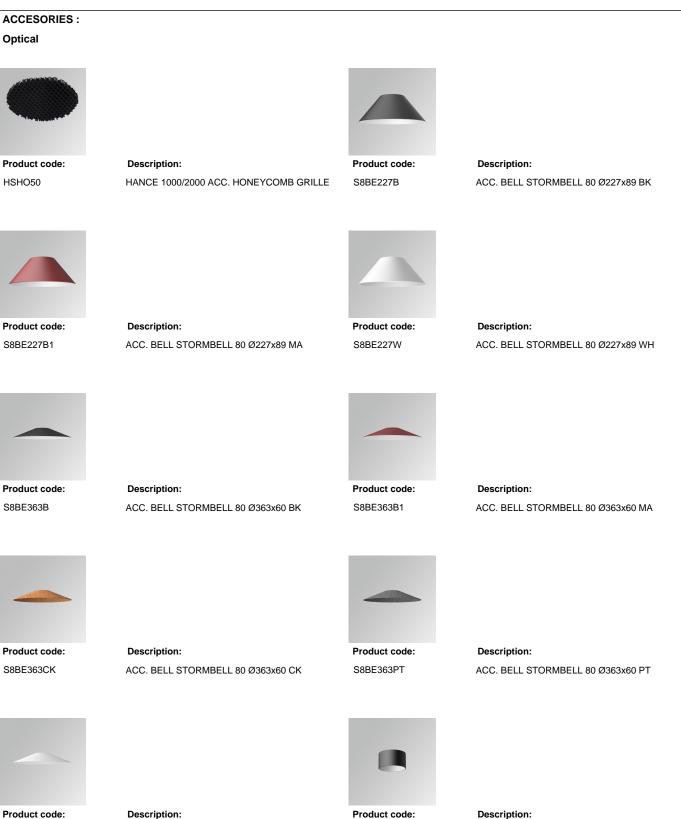

S8BE363W

Description: ACC. BELL STORMBELL 80 Ø363x60 WH

Product code: S8BE86B

ACC. BELL STORMBELL 80 Ø86x50 BK

Product datasheet





Product code:

S8BE86B1

Description: ACC. BELL STORMBELL 80 Ø86x50 MA



Product code: S8BE86W Description: ACC. BELL STORMBELL 80 Ø86x50 WH