


## ST18SSLOWF930DB1



### STORMBELL 80 SU SF 1500 WW WFL DA BK/MA

#### **Description:**

Downlight to suspend model STORMBELLMBELL 80 SU SF 1500 WW WFL DA BK/BK LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 3000K color temperature and CRI90. Aluminium reflector WIDE FLOOD. Luminaire with ceiling rose and electronic DALI equipment included. Insulation class I. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.



Finish: Palette MATERIALITE - 1 TEXTURED Weight: 800 g

Installation: Suspended

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.384 lm	⁰K :	3000
Plum:	13,9W	CRI :	90
Efficacy:	99,6 lm/w	R9 :	60
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Power Supply:	220-240V 50/60Hz
Power:	12.2W	Gear:	Adjustable DALI

### Light output tolerance +/- 10%



# CUSTOM MADE OPTIONS:







ST18SSLOWF930DB1


STORMBELL 80 SU SF 1500 WW WFL DA BK/MA

# PHOTOMETRIC DATA :

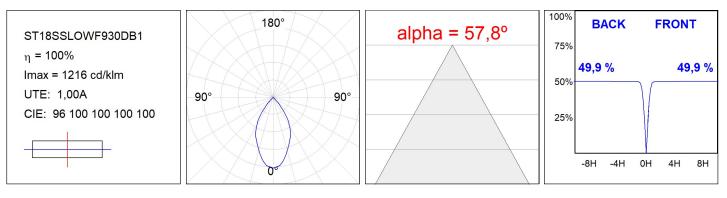

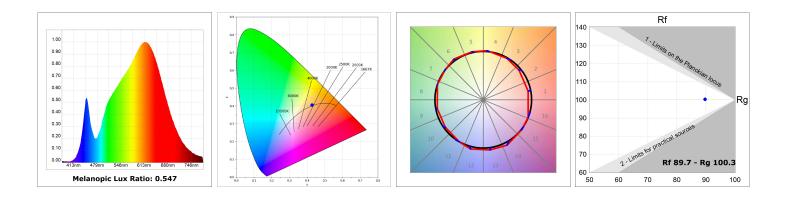



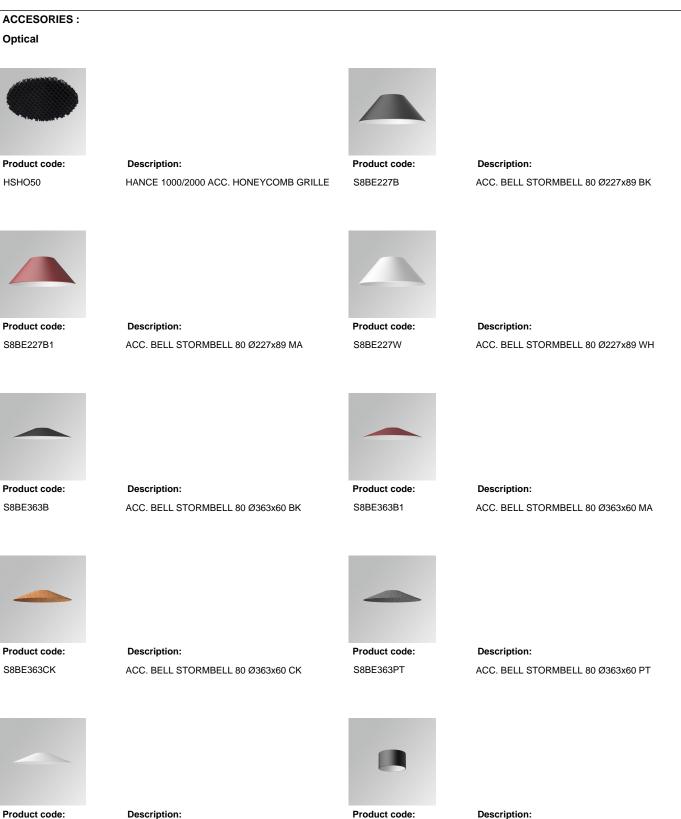

S8BE363W

Description: ACC. BELL STORMBELL 80 Ø363x60 WH

Product code: S8BE86B

ACC. BELL STORMBELL 80 Ø86x50 BK

## Product datasheet





Product code:

S8BE86B1

Description: ACC. BELL STORMBELL 80 Ø86x50 MA



Product code: S8BE86W Description: ACC. BELL STORMBELL 80 Ø86x50 WH