


ST18SSLOWF930NBW



STORMBELL 80 SU SF 1500 WW WFL BK/WH

Description:

Downlight to suspend model STORMBELLMBELL 80 SU SF 1500 WW WFL BK/WH LAMP brand. Body made of injected aluminum with white/black/Materiality finish, and with black/opal polycarbonate ring, for decorative lighting effect and possibility of accessory color filter, depending on his model. COB LED 3000K color temperature and CRI90. Aluminium reflector WIDE FLOOD. Luminaire with ceiling rose and electronic equipment included. Insulation class I. LED life time: 50000 L90 B10. Compatible with 4 different models of bells (accessories) that complete the luminaire.

Finish: Texturised white RAL 9010

Weight: 800 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.384 lm	°K :	3000
Plum:	14,1W	CRI :	90
Efficacy:	98,2 lm/w	R9 :	60
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12.2W	Gear:	Electronic


Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**

ST18SSLOWF930NBW

STORMBELL 80 SU SF 1500 WW WFL BK/WH

PHOTOMETRIC DATA :

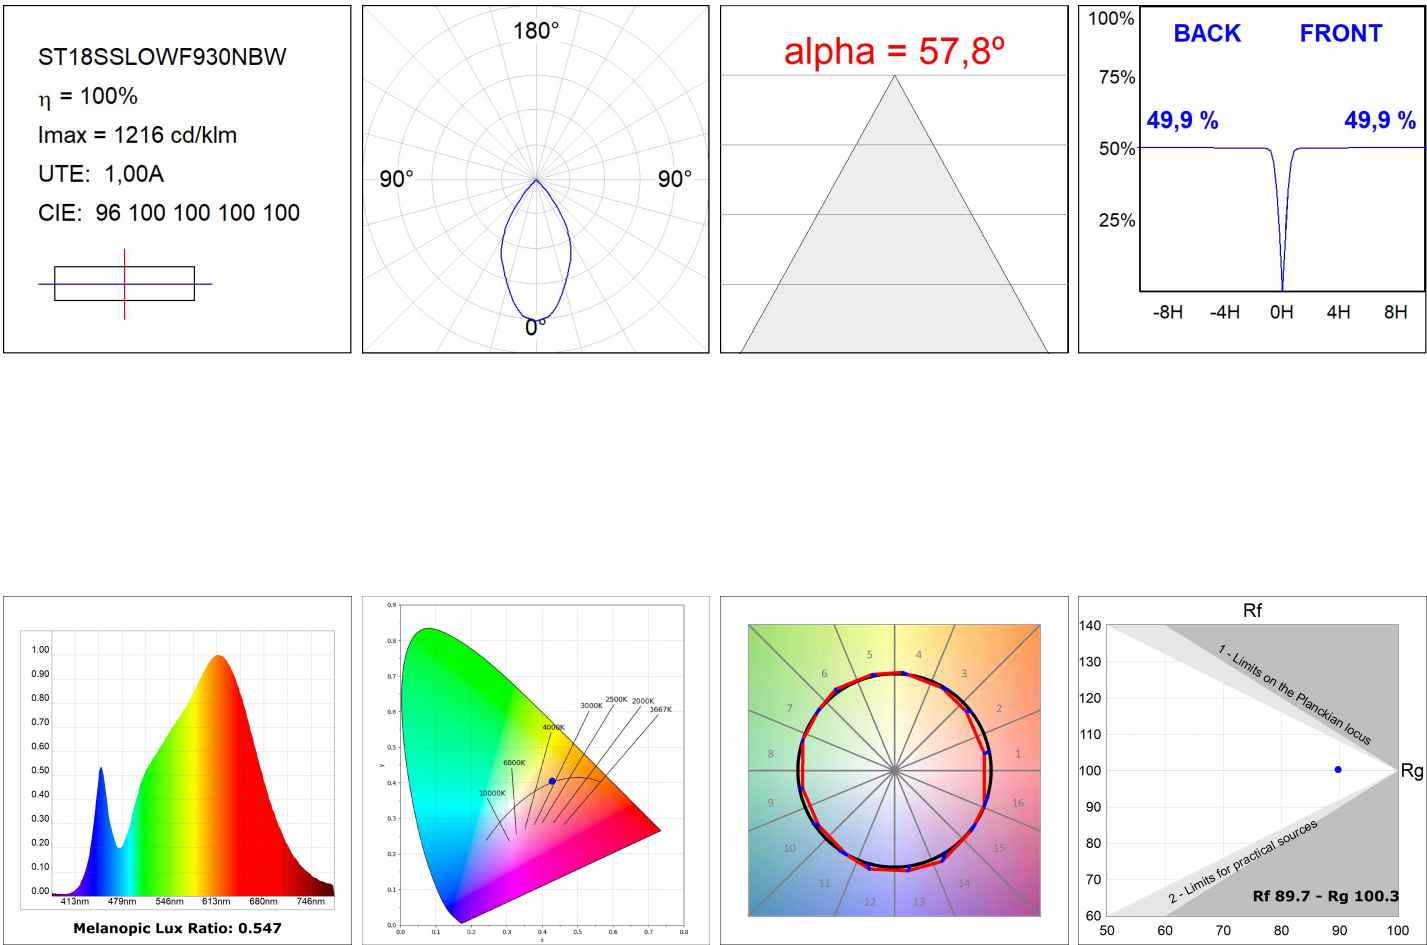

ACCESSORIES :**Optical****Product code:**

HSHO50

Description:

HANCE 1000/2000 ACC. HONEYCOMB GRILLE

**Product code:**

S8BE227B

Description:

ACC. BELL STORMBELL 80 Ø227x89 BK

**Product code:**

S8BE227B1

Description:

ACC. BELL STORMBELL 80 Ø227x89 MA

**Product code:**

S8BE227W

Description:

ACC. BELL STORMBELL 80 Ø227x89 WH

**Product code:**

S8BE363B

Description:

ACC. BELL STORMBELL 80 Ø363x60 BK

**Product code:**

S8BE363B1

Description:

ACC. BELL STORMBELL 80 Ø363x60 MA

**Product code:**

S8BE363CK

Description:

ACC. BELL STORMBELL 80 Ø363x60 CK

**Product code:**

S8BE363PT

Description:

ACC. BELL STORMBELL 80 Ø363x60 PT

**Product code:**

S8BE363W

Description:

ACC. BELL STORMBELL 80 Ø363x60 WH

**Product code:**

S8BE86B

Description:

ACC. BELL STORMBELL 80 Ø86x50 BK



Product code:
S8BE86B1

Description:
ACC. BELL STORMBELL 80 Ø86x50 MA



Product code:
S8BE86W

Description:
ACC. BELL STORMBELL 80 Ø86x50 WH