

UR1SQ0465AS940NG




URBAN 100 SQ 400 IP65 NW ASYM GR

Description:

Recessed outdoor wall floodlight, model URBAN 100, LAMP brand. Made of injected aluminium and painted in textured grey, with tempered glass. Clamping box included. Model for LED HI-POWER with 4000K colour temperature, CRI 90, and control gear included. IP65, IK07 protection rating. Insulation class I. Lifetime: 50 000 L90B10. BUG Rate: B0 U0 G0, ULOR: 0%.

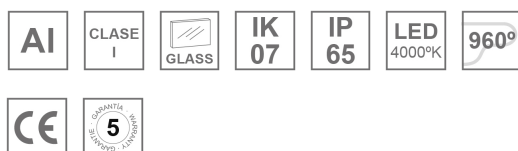
Finish: Texturised grey

Dimensions: 105 x 105 x 63 mm

Weight: 708 g

Installation: Wall recessed

Recessing measures: 95 x 95 x 0 mm
TECHNICAL SPECIFICATIONS:

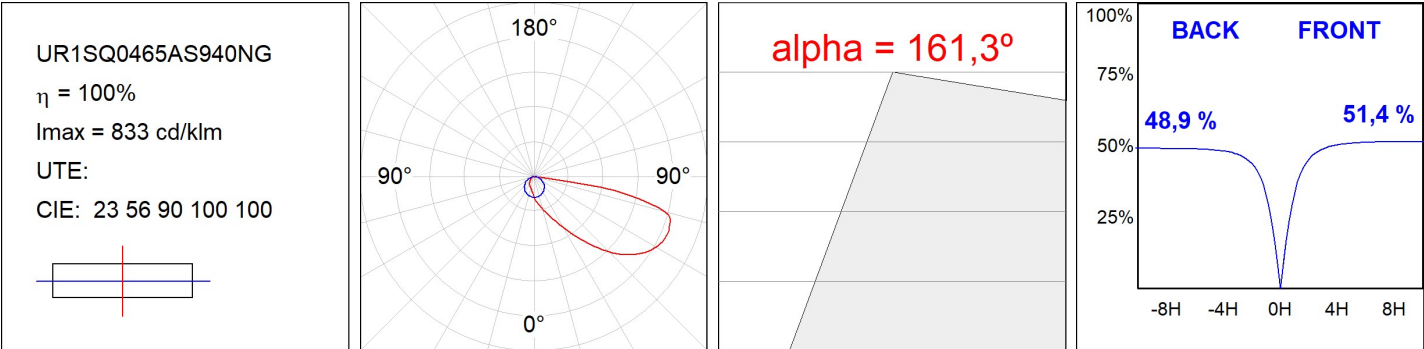
Light output:	113 lm	°K :	4000
Plum:	1,7W	CRI :	90
Efficacy:	66,5 lm/w	MacAdam:	3
Type:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	1W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

UR1SQ0465AS940NG

URBAN 100 SQ 400 IP65 NW ASYM GR

PHOTOMETRIC DATA :



ACCESORIES :

Assembly



Product code:

CT4P67N

Description:

ACC. IP67 4P CONNECTOR