


Quiet Round Kombic

Quiet Round Kombic



DESCRIPTION:

Downlight integrated in sound-absorbing suspended panel with fabric-type finish, made of recycled material rPET model Quiet Round Kombic 100 (2000 lm) or Kombic 150 (3000 lm). Other luminous fluxes available. Die-cast aluminium dissipater. Models with opal diffuser or optics for greater visual comfort (reaching UGR<17 in certain models). Available in various colour temperatures (3000 and 4000K) and dynamic white option (2700-6500K), LED technology with CRI of 80 and CRI 90 option. On/Off or Dali equipment with the possibility of control via Bluetooth LE. With IP40 degree of protection. Insulation class I. Photobiological safety group 0. Flicker-free.

Available luminaire finishes:

- Opal Model: Bright, matte metallic or white interior reflector and white exterior finish.
- Optic Model: Black inner reflector and black or white outer finish, or matt metallic or white inner reflector and white outer finish.

Dimensions: ø790 (Kombic 100) ø1180 (Kombic 150)

Panel thickness: 12mm (Option 24mm)

Panel composition: rPET 75% Recycled

Fire Resistance: B-s1, d0

Emissions: LOW VOC/ Low formaldehyde emissions

INSTALLATION: Suspended

QUIET ROUND KOMBIC 100

Family	Lm LED	Optic	CRI	K	Gear
QRK11	20 2000lm	OP Opal WF WFL 50°	8 80	30 3000 K 40 4000 K	N ON/OFF D DALI

Code configurator:

QUIET ROUND KOMBIC 150

Family	Lm LED	Optic	CRI	K	Gear
QRK21	30 3000lm	OP Opal WF WFL 50°	8 80	30 3000 K 40 4000 K	N ON/OFF D DALI

Code configurator:

SOUND ABSORBENCE

Separated 50mm from the ceiling
 12mm aw 0.60
 24mm aw 0.70

Separated 200mm from the ceiling
 12mm aw 0.85
 24mm aw 0.95

Separated 400mm from the ceiling
 12mm aw 0.85
 24mm aw 0.95

LIGHT OUTPUT AND POWER

QUIET ROUND KOMBIC 100 OPAL

2000lm				
	K	CRI	W	lm Output
BR	3000	80	13	1460
	4000	80	13	1547
MA	3000	80	13	1392
	4000	80	13	1474
WH	3000	80	13	1454
	4000	80	13	1541

QUIET ROUND KOMBIC 100 100 OPTIC

2000lm				
	K	CRI	W	lm Output
BK	3000	80	14	1205
	4000	80	14	1277
MA	3000	80	14	1268
	4000	80	14	1343
WH	3000	80	14	1275
	4000	80	14	1351

QUIET ROUND KOMBIC 150 OPAL

3000lm				
	K	CRI	W	lm Output
BR	3000	80	19,9	2096
	4000	80	19,9	2184
MA	3000	80	19,9	2010
	4000	80	19,9	2094
WH	3000	80	19,9	2074
	4000	80	19,9	2161

QUIET ROUND KOMBIC 150 OPTIC

3000lm				
	K	CRI	W	lm Output
BK	3000	80	19,9	1613
	4000	80	19,9	1680
MA	3000	80	19,9	1618
	4000	80	19,9	1685
WH	3000	80	19,9	1677
	4000	80	19,9	1737

Quiet Round Kombic

TECHNICAL SPECIFICATIONS:



QUALITY CERTIFICATES:




FINISHES:




Quiet Round Kombic

PHOTOMETRIC DATA :

0P

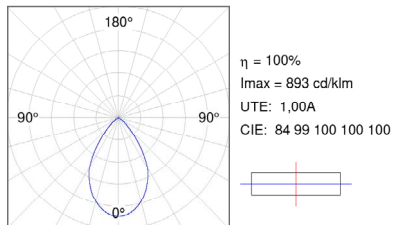

WFL 50°

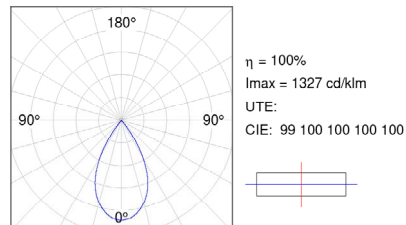

INSTALATION :

