


Kombic 100 Surface Wellbeing

KOMBIC 100 SURFACE WELLBEING



DESCRIPCIÓN:

Surface or suspended downlight model KOMBIC 100 of 1500 or 2000 lm with Wellbeing technology by Lamp. Wellbeing technology by Lamp. Die-cast aluminium heat sink. Models with opal diffuser or optics for a greater visual comfort (reaching UGR<17 in some models). 3000 K or 4000 K Wellbeing LEDs, both with a spectral distribution of low emissions in the 450 nm wavelength and circadian optimisation through the circadian optimisation through emissions in the 480nm wavelength, with CRI of 97 and R9 higher than 50. On/Off or Dali with the possibility of control via Bluetooth LE. With IP40 degree of protection. Isolation class I. Photobiological safety group 0.

Available finishes:

- Opal model: Bright, metalized matt or white interior reflector and white or black exterior finishing.
- Optic model: Black interior reflector and black or white exterior finishing, or interior reflector in metalized matt or white and white exterior finishing.

Dimensions: diameter 99 mm.

Weight: 498 g

INSTALLATION: Surface or suspended

KOMBIC 100 SURFACE WELLBEING OPAL

Family	Installation	Lm LED	IP	Optic	K	Gear	Reflector Finishes	Ext. Finishes
K11	SF Surface	15 1500lm	40 IP 40	OP Opal	WB3 3000 WB WB4 4000 WB	N ON/OFF D DALI	R Bright M Metalized Matt W White	W White 02 B Black 02
		20 2000lm						

Code configurator:

KOMBIC 100 SURFACE WELLBEING OPTIC

Family	Installation	Lm LED	IP	Optic	K	Gear	Reflector Finishes	Ext. Finishes
K11	SF Surface	15 1500lm	40 IP 40	WF WFL 50°	WB3 3000 WB WB4 4000 WB	N ON/OFF D DALI	B Black M Metalized Matt W White	B Black 02 W White 02
		20 2000lm						

Code configurator:

LIGHT OUTPUT AND POWER

KOMBIC 100 WELLBEING OPAL

	K	CRI	12001m		18001m	
			W	lm Output	W	lm Output
BR	3000	97	14	925	20	1267
	4000	97	14	991	20	1357
MA	3000	97	14	885	20	1197
	4000	97	14	948	20	1272
WH	3000	97	14	923	20	1271
	4000	97	14	995	20	1361

KOMBIC 100 WELLBEING OPTIC

	K	CRI	12001m		18001m	
			W	lm Output	W	lm Output
BR	3000	97	14	795	20	1068
	4000	97	14	851	20	1144
MA	3000	97	14	821	20	1141
	4000	97	14	879	20	1222
WH	3000	97	14	850	20	1148
	4000	97	14	910	20	1230

FINISHES:

B: Black 02: ● RAL 9011 BLACK MATT

W: White 02: ○ RAL 9010 WHITE MATT

TECHNICAL SPECIFICATIONS:




QUALITY CERTIFICATES:




Kombic 100 Wellbeing

PHOTOMETRIC DATA:


Opal

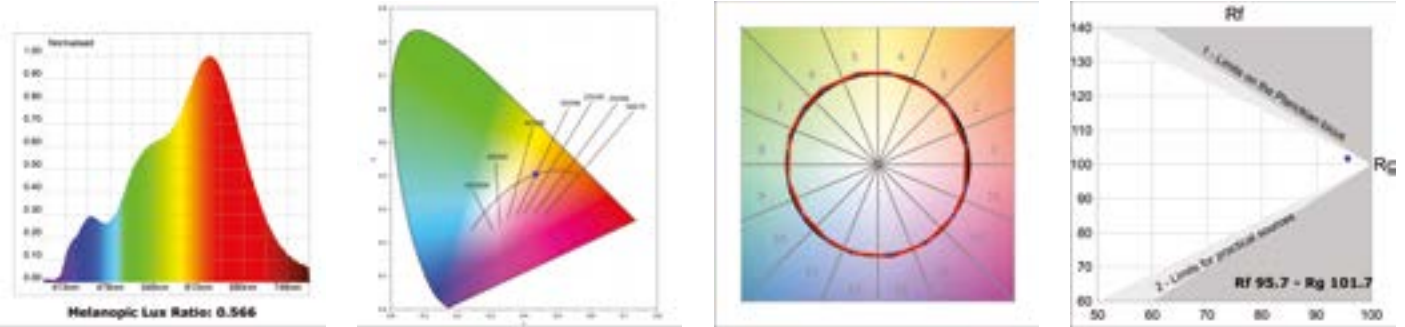


WFL 50°

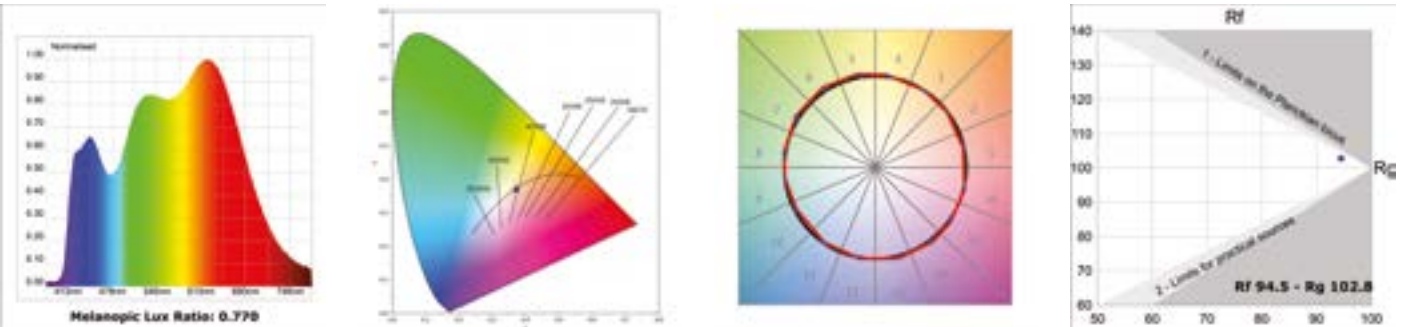

Opal



WFL 50°



Kombic 100 Wellbeing

ACCESSORIES:



Product Code:

K1SUCARG0500DB
K1SUCARG0500NB
K1SUCARG1000DB
K1SUCARG1000NB

Description:

KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 B
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 B
KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M BK
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M BK



Product Code:

K1SUCARG0500DW
K1SUCARG0500NW
K1SUCARG1000DW
K1SUCARG1000NW

Description:

KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 W
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 W
KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M WH
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M WH



Product Code:

K1SUCAWI2000DB
K1SUCAWI2000NB

Description:

KOMBIC 100 SF ACC. ELEC 5P SUSP 2M BK.
KOMBIC 100 SF ACC. ELEC 3P SUSP 2M BK.



Product Code:

K1SUCAWI2000DW
K1SUCAWI2000NW

Description:

KOMBIC 100 SF ACC. ELEC 5P SUSP 2M WH.
KOMBIC 100 SF ACC. ELEC 3P SUSP 2M WH.