
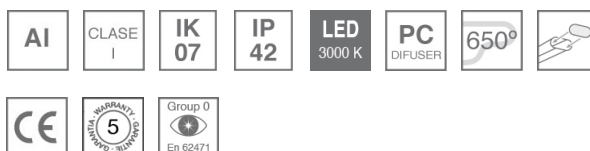


14741510

**FIL LED G2 OPAL REC 4600 WW WH.****Description:**


Recessed luminaire model FIL LED G2 OPAL REC 4600 WW WH., LAMP brand. Made of satin white painted extruded aluminium with opal polycarbonate diffuser. Model for MID-POWER LED, warm white colour temperature and control gear included. With opal polycarbonate diffuser. With a IP42, IK07 protection rating. Insulation class I. Photobiological safety group 0.

**Finish:** Matte white RAL 9010**Dimensions:** 1.700 x 66 x 67 mm**Weight:** 2.860 g**Installation:** Recessed**Recessing measures:** 1,710 x 52 x 80 mm**TECHNICAL SPECIFICATIONS:****Light output:** 2.850 lm**°K :** 3000**Plum:** 31,2W**CRI :** 80**Efficacy:** 91,3 lm/w**MacAdam:** 3**Type:** MID POWER TRIDONIC**Power Supply:** 220-240V 50/60Hz**LED Lifetime:** 50000 L80 B10**Gear:** Electronic**Power:** 28W**Light output tolerance +/- 10%**

14741510


FIL LED G2 OPAL REC 4600 WW WH.

PHOTOMETRIC DATA :

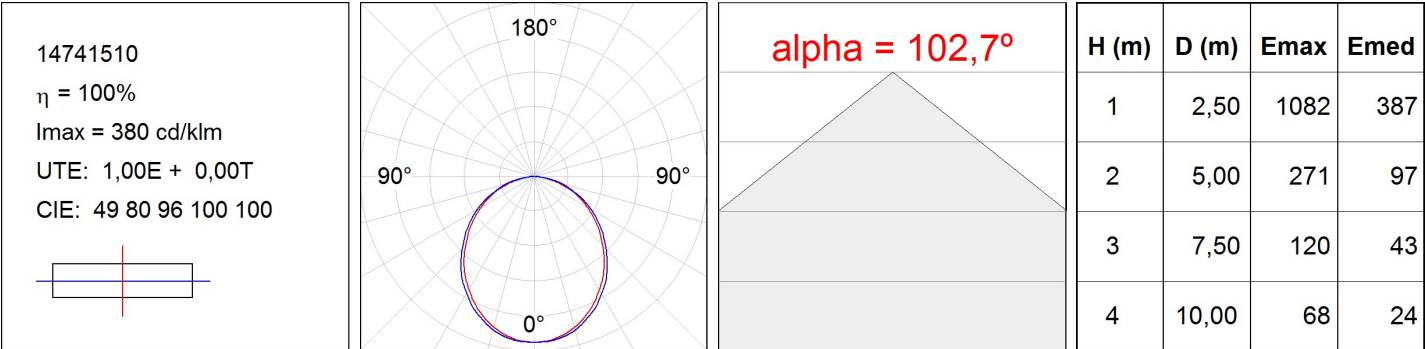

**ACCESORIES :**

**Assembly**



**Product code:**

4700580

4700583

4705100

4705103


**Description:**

FIL ACC. REC PROFILE X/MM WH.

FIL ACC. REC PROFILE X/MM GR.

FIL ACC. COVER X/MM WH.

FIL ACC. COVER X/MM GR.



**Product code:**


4705210

4705213

**Description:**

FIL ACC. REC 90° CORNER WH.

FIL ACC. REC 90° CORNER GR.



**Product code:**

4706450

4706453

**Description:**

FIL ACC. REC END COVER WH.

FIL ACC. REC END COVER GR.



**Product code:**

9600990

**Description:**

ACC. ELECTROSTATICS WRIST STRAP



**Product code:**

9606010

**Description:**

ACC. INTM JOINT B

**ACCESORIES :**

**Optical**



**Product code:**

4700590

**Description:**

FIL ACC. OPAL DIFFUSER X/MM