

KOMBIC 200 DOWNLIGHT

9241370



KOMBIC 200 RD 4000 IP40 WW OPAL BR/WH


Description:

Round recessed downlight model KOMBIC 200 RD 4000 IP40 WW OPAL BR/WH, LAMP brand. Interior diffuser made of opal methacrylate specially for LED and bright metallic reflector, injection aluminium dissipator and TOR KIT type easy-fit fastening system. Model for MID-POWER LED, with warm white colour temperature and control gear included. IP44 protection rating.

Insulation class II. Photobiological safety group 0.

Finish: Shiny white RAL 9010

Weight: 976 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.800 lm	°K :	3000
Plum:	25,4W	CRI :	80
Efficacy:	110,2 lm/w	MacAdam:	3
Type:	MID POWER TRIDONIC	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10	Gear:	Electronic
Power:	24W		

Light output tolerance +/- 10%

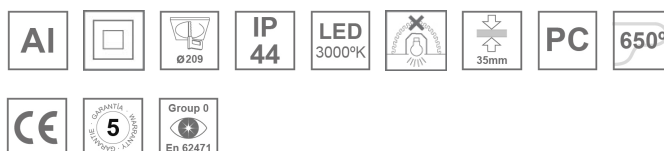


KOMBIC 200 DOWNLIGHT

9241370

KOMBIC 200 RD 4000 IP40 WW OPAL BR/WH

PHOTOMETRIC DATA :

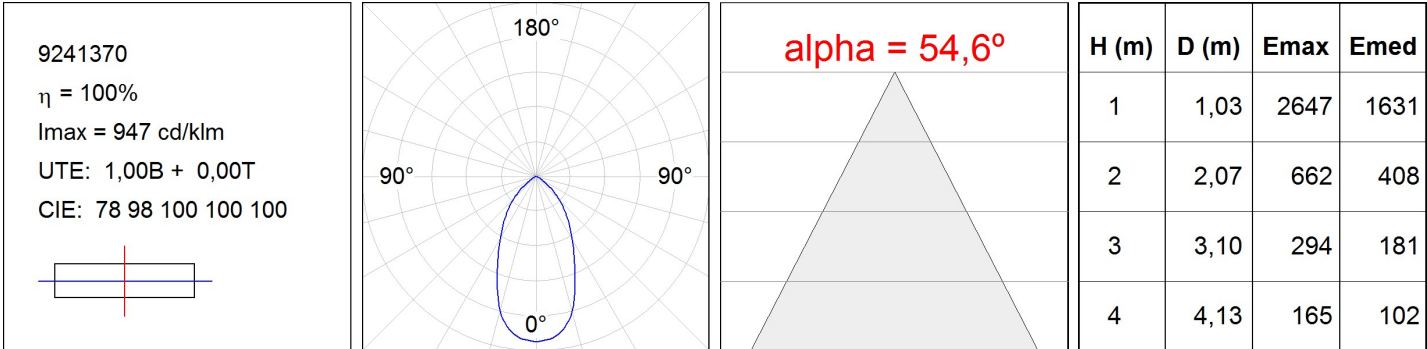

ACCESORIES :

Optical



Product code:

8606140

8606143

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS WH.

DOMO 220/KOMBIC ACC. TRANSP GLASS GR.



Product code:

8606142

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS BK.



Product code:


9200210

9200213

Description:

DOMO 220/KOMBIC ACC. DECO RING WH.

DOMO 220/KOMBIC ACC. DECO RING GR.



Product code:

9200212

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

9200220

Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.