
### Product datasheet

## FIL35


## F31RE168MOTE940NW





### Description:

Recessed structure for suspension or surface mounting, model FIL35 TECH by LAMP. Made of 80% recycled aluminium extrusion, length 1680 mm,with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<12. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic wiring. With IP43, IK07 degree of protection. Insulation class I. Photobiological safety group 0. Lifetime: 50000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



# Finish: Matte white RAL 9010

Dimensions: 1.680 x 35 x 76 mm

Weight: 4.000 g


Installation: Recessed

Recessing measures: 1,688 x 42 x 0 mm

### **TECHNICAL SPECIFICATIONS:**

Light output:	2.640 lm	٩ <b>Κ</b> :	4000
Plum:	26,7W	CRI :	90
Efficacy:	98,9 lm/w	R9 :	85
UGR:	<12	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	22W		

### Light output tolerance +/- 10%



### **CUSTOM MADE OPTIONS:**




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


## FIL35

F31RE168MOTE940NW

FIL35 REC 1680 4400 9NW TECH WH



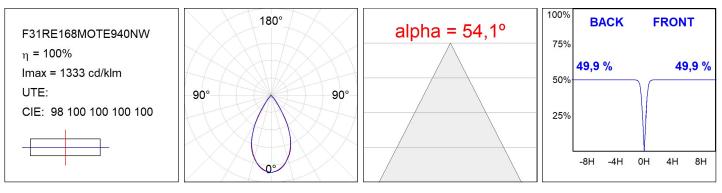

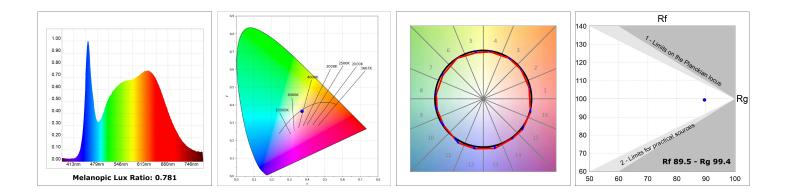

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Worktitude for light