

F53RE168MOOP830NG



- FIL50 G3 REC 1680 3900 WW OPAL GR

Description:

LAMP recessed structure FIL 50 REC 1120. Manufactured from extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. White and grey finishes available. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.


Finish: Gloss grey

Dimensions: 1.683 x 66 x 67 mm

Weight: 2.860 g

Installation: Recessed

Recessing measures: 1,693 x 52 x 80 mm



TECHNICAL SPECIFICATIONS:

Light output:	2.994 lm	°K :	3000
Plum:	31,20W	CRI :	80
Efficacy:	96 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	26.8W		


Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

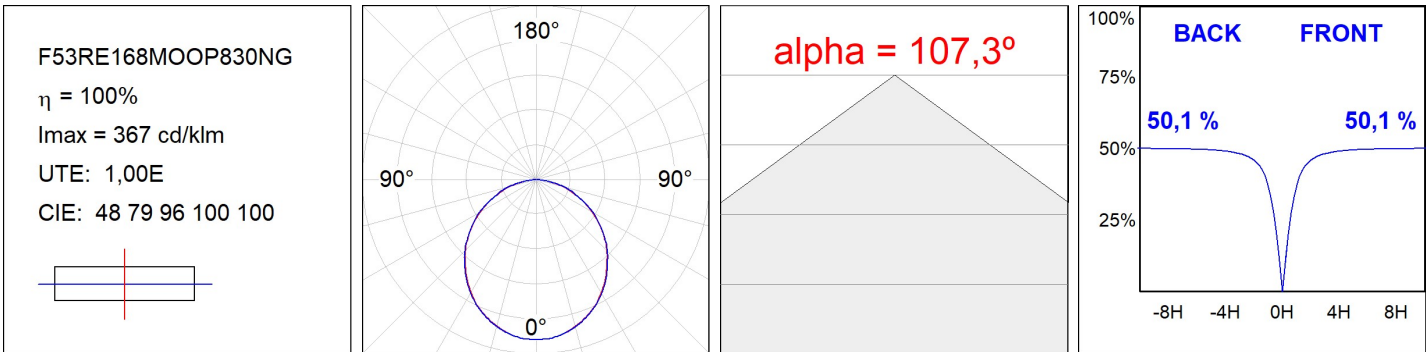

ACCESORIES :

Assembly



Product code:

ELWRST

Description:

ACC. ELECTROSTATICS WRIST STRAP



Product code:

F5COX/MMG  
F5COX/MMW  
F5PREX/MMG  
F5PREX/MMW

Description:

FIL 50 ACC. COVER X/MM GR.  
FIL 50 ACC. COVER X/MM WH.  
FIL 50 ACC. REC PROFIL X/MM GR.  
FIL 50 ACC. REC PROFIL X/MM WH.



Product code:

F5DIX/MMOP

Description:

FIL 50 ACC. OPAL DIFFUSER X/MM




Product code:

F5JO

Description:

ACC. INTM JOINT B




Product code:

F5REECG  
F5REECW

Description:

FIL 50 ACC. REC END COVER GR.  
FIL 50 ACC. REC END COVER WH.



Product code:

F5REHCG  
F5REHCW

Description:

FIL 50 ACC. REC 90° CORNER GR.  
FIL 50 ACC. REC 90° CORNER WH.